




Professional mulcher of high range for the maintenance of banks, margins, channels, local ways, environmental and agricultural works, for wood up to 8 cm. Lateral and movable, built with SERRAT system of direct transmission (without belts). Accident insurance system, designed in the center of the machine that manages to avoid accidents, especially when using the machine in front of the tractor. Front and rear hooking.

### CHARACTERISTICS


- ▶ Non-wear steel-plate chassis, thickness 6 mm.
- ▶ Rotor POLSER of Ø 450 mm.
- ▶ Direct gearboxes SERRAT.
- ▶ Hammers guaranteed against breakage.
- ▶ GIROSTOP System.
- ▶ Supports of bearing rotor in steel.
- ▶ Height-adjustable rear roller Ø 180 mm.
- ▶ PTO 1.000 rpm.
- ▶ High speed and high strength bearings.
- ▶ Front protection curtain.
- ▶ Double bearing on rear roller.
- ▶ Hydraulic side shift.
- ▶ Angulation de +90° a -60°.
- ▶ Safety valve.
- ▶ Model built under EC Normative.
- ▶ Safety indicators visible to personnel.



### Security system

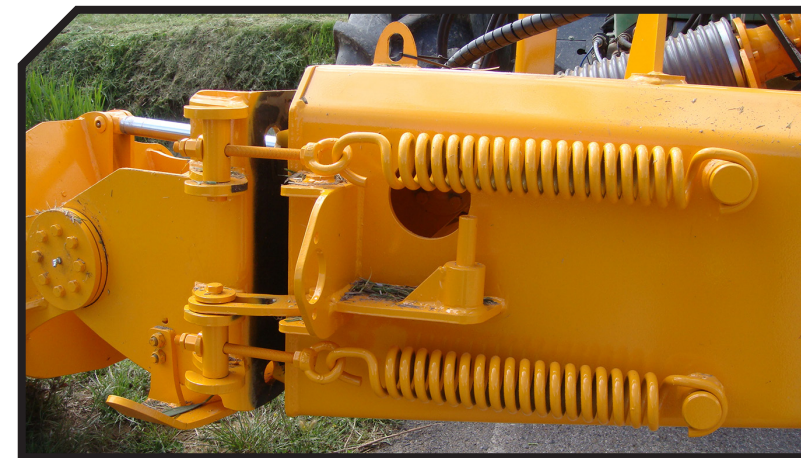

### System antiwire in rotor

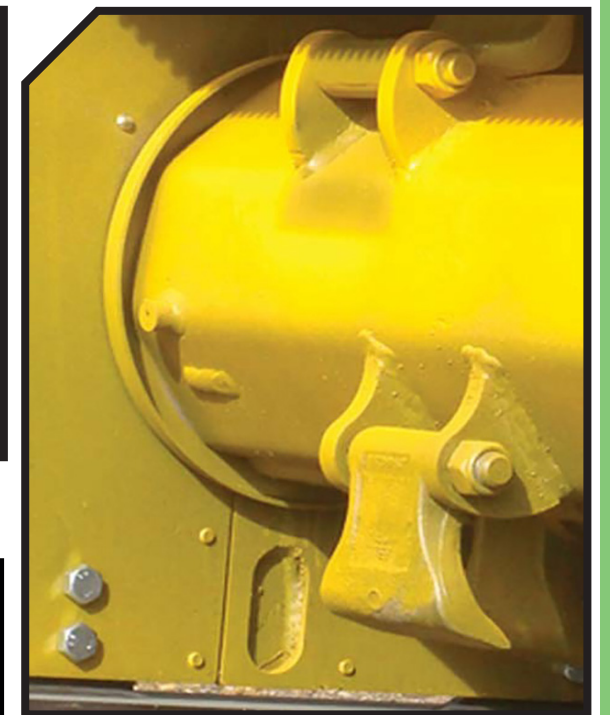






### Angulation: +90°



### -70°



MODEL										
										
	mm	KW-HP			A	A	B	B	C	C
	mm				mm	in	mm	in	mm	in
T-1800	1800	60 - 80 96 - 130	16	1190	4160	164"	920	36"	842	33"
T-2000	2000	74 - 100 96 - 130	16	1220	4370	172"	920	36"	842	33"
										1000

### OPTIONS



▶ Freewheel on transmission

