



Professional mulcher of high range for the maintenance of banks, margins, channels, local ways, environmental and agricultural works, for wood up to 12 cm.

Angulation +90° / -65°.

It incorporates rotor POLSER of 550 mm of diameter.

CHARACTERISTICS

- ▶ Non-wear steel-plate chassis, thickness 8 mm.
- ▶ Rotor POLSER of Ø 550 mm.
- ▶ Direct gearboxes SERRAT.
- ▶ Hammers guaranteed against breakage.
- ▶ GIROSTOP System.
- ▶ Supports of bearing rotor in steel.
- ▶ Rear height-adjustable roller Ø 180/210 mm (from T-2500).
- ▶ PTO 1.000 rpm.
- ▶ High speed and high strength bearings.
- ▶ Front protection curtain.
- ▶ Double bearing on rear roller.
- ▶ Hydraulic side shift.
- ▶ Angulation de +90° a -60°.
- ▶ Model built under EC Normative.
- ▶ Safety indicators visible to personnel.



Lateral hydraulic offset



Angulation: +90°



Direct SERRAT gearboxes




-65°




System atiwire in rotor

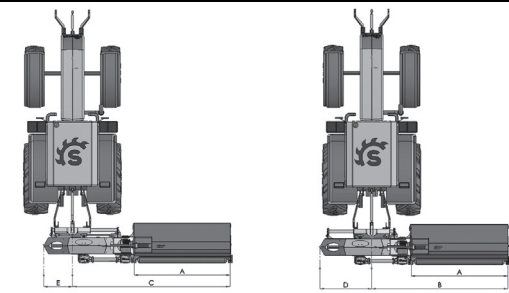

MODEL															
					A	A	B	B	C	C	D	d	E	e	
	mm	KW-HP			mm	in	mm	in	mm	in	mm	in	mm	in	
T-1600	1600	74- 100 149 - 200	12	1520	1600	63"	2630	104"	3220	127"	1345	53"	750	30"	1000
T-1800	1800	82- 110 149 - 200	16	1575	1800	71"	2830	112"	3420	135"	1345	53"	750	30"	1000
T-2000	2000	86- 115 149 - 200	16	1620	2000	79"	3030	119"	3620	143"	1345	53"	750	30"	1000
T-2300	2300	89- 120 149 - 200	20	1785	2300	91"	3330	131"	3920	154"	1345	53"	750	30"	1000
T-2500	2500	101- 136 149 - 200	20	1825	2500	98"	3530	139"	4120	162"	1345	53"	750	30"	1000

OPTIONS



▶ Freewheel on transmission

