



Head for mini excavators of weight until 3,5 t.

Steel-plate chassis of 4 mm with the hooking screwed on the top of the mulcher.

Hydraulic motor with Synkrochain belt.


Suitable for the maintenance of greenspaces, riverbanks, bushes up to 2-3 cm.

CHARACTERISTICS


- ▶ Non-wear steel-plate chassis, thickness 4 mm.
- ▶ Tubular rotor with grass flails or small forged agricultural hammers SERRAT.
- ▶ Head for mini excavators of weight until 3,5 t.
- ▶ Synchronous belts transmission.
- ▶ Double safety chains.
- ▶ High speed and high strength bearings.
- ▶ Hydraulic gear motor.
- ▶ Valve of recirculation incorporated into the motor.
- ▶ Front skid shoes.
- ▶ Model built under EC Normative.
- ▶ Safety indicators visible to personnel.



Hydraulic gear motor

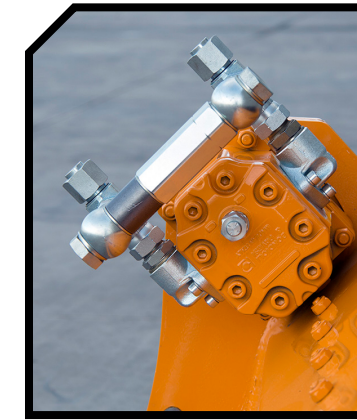

Tubular rotor with grass flails or hammers

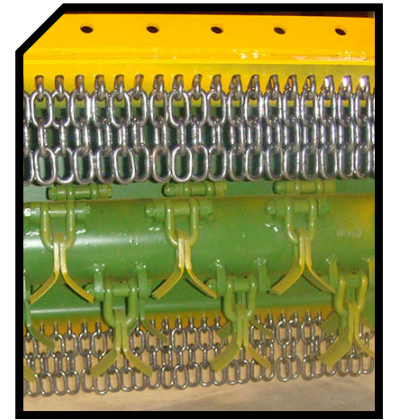

MODEL	mm	POWER mín. req.	máx. aut.	16x2	9	140	Nº BELTS TYPE	A mm	A in	B mm	B in	C mm	C in	máx.
T-800	800	35-45 l/min	220 bar	16x2	9	140	Synchronous	910	36"	640	25"	487	19"	3000

OPTIONS



▶ Height adjustable rear roller



▶ Hooking

