



Offset mulcher of high range with forestry rotor, for works in agricultural margins, banks, highways, channels, roads and others clears of public works for tractors between 120-180 CV. It incorporates safety system thanks to a valve positionned in the cylinder of elevation of the arm.

Angulation +90° / -65°.


Rotor POLSER+ of 550 mm Ø with forestry SERRAT hammer swinging 360°.

CHARACTERISTICS

- ▶ Non-wear steel-plate chassis, thickness 10 mm.
- ▶ Rotor POLSER+ of Ø 550 mm.
- ▶ Gearbox SERRAT.
- ▶ 4 XPC side belt transmission.
- ▶ Double transmission with a centre shaft and homocinetic knot on the second transmission.
- ▶ Supports of bearing rotor in steel.
- ▶ Height-adjustable rear roller Ø 210 mm.
- ▶ PTO 1.000 rpm.
- ▶ High speed and high strength bearings.
- ▶ Front protection curtain.
- ▶ Front skid shoes.
- ▶ Double bearing on rear roller.
- ▶ Angulation +90°/-50°.
- ▶ Hydraulic lateral offset mulcher.
- ▶ Safety valve.
- ▶ Model built under EC Normative.
- ▶ Safety indicators visible to personnel.



Central bridge

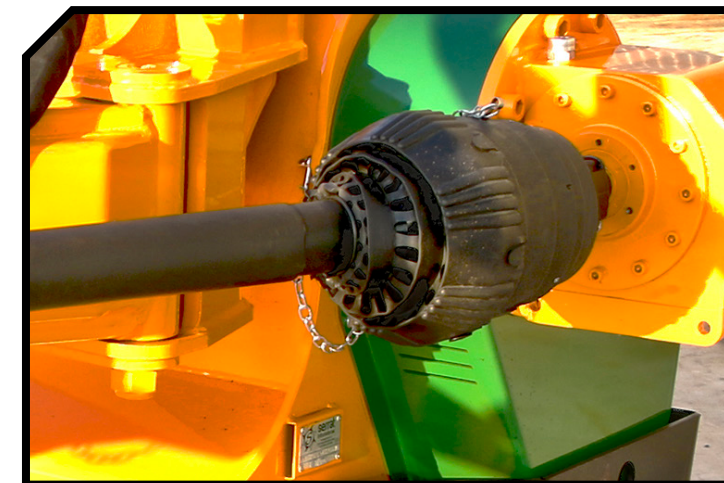

Angulation:


+90°




-65°



Homokinetic join on the second drive shafts

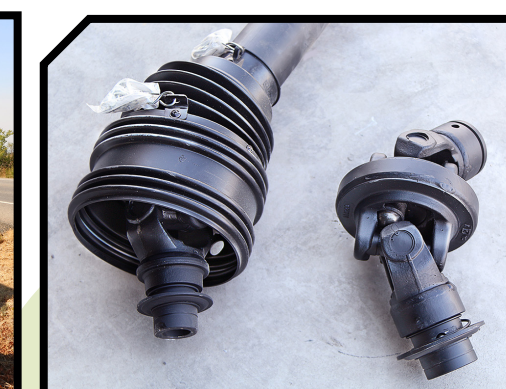

MODEL					N° BELTS TYPE							
						A mm	A in	B mm	B in	C mm	C in	
T-1250	2000	119 - 160 164 - 220	9	1200	4 XPC	1760	69"	2816	111"	1485	58"	1000
T-1600	1600	127 - 170 164 - 220	12	1600	4 XPC	2160	85"	2816	111"	1485	58"	1000
T-1800	1800	130 - 175 164 - 220	16	1800	4 XPC	2360	93"	2816	111"	1485	58"	1000
T-2000	2000	134 - 180 164 - 220	16	2050	4 XPC	2560	100"	2816	111"	1485	58"	1000
T-2300	2300	138 - 185 164 - 220	20	2300	4 XPC	2860	113"	2816	111"	1485	58"	1000
T-2500	2500	145 - 195 164 - 220	24	2400	4 XPC	3060	120"	2816	111"	1485	58"	1000

