



CHARACTERISTICS

- ▶ Non-wear steel-plate chassis, thickness 10 mm.
- ▶ Rotor POLSER of Ø 550 mm.
- ▶ External gearbox SERRAT.
- ▶ 4 XPC side belt transmission.
- ▶ Double transmission with a centre shaft and homocinetic knot on the second transmission.
- ▶ Supports of bearing rotor in steel.
- ▶ Height-adjustable rear roller Ø 210 mm.
- ▶ PTO 1.000 rpm.
- ▶ High speed and high strength bearings.
- ▶ Front protection curtain.
- ▶ Front skid shoes.



- ▶ Double bearing on rear roller.
- ▶ Angulation +90° / -50°.
- ▶ Hydraulic lateral offset mulcher.
- ▶ Safety valve.
- ▶ Model built under EC Normative.
- ▶ Safety indicators visible to personnel.

DAP +

550
POLSER SEKURLAST


Centre shaft with homocinetic knot




Springs safety system

Angulation:
+90°

Agricultural hammers model SERRAT

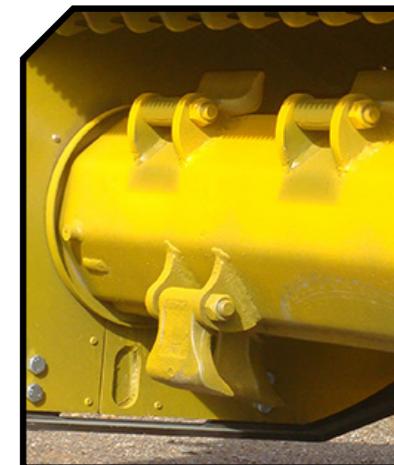

-50°

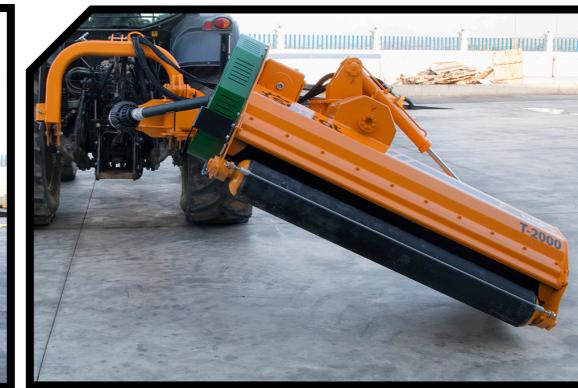

MODEL	mm	KW-HP		Nº BELTS TYPE	A mm-in	B1 mm-in	B2 mm-in	C mm-in	D mm-in	E mm-in		
T-1800	1800	89 - 120 127 - 170	16	1655	4 XPC	1800 - 71"	2785 - 110"	2900 - 114"	190 - 7"	2825 - 111"	725 - 29"	1000
T-2000	2000	97 - 130 127 - 170	16	1710	4 XPC	2000 - 79"	2785 - 110"	2900 - 114"	190 - 7"	3025 - 119"	925 - 36"	1000
T-2300	2300	104 - 140 134 - 180	20	1790	4 XPC	2300 - 91"	2785 - 110"	2900 - 114"	190 - 7"	3325 - 131"	1225 - 48"	1000
T-2500	2500	112 - 150 134 - 180	20	1835	4 XPC	2500 - 98"	2785 - 110"	2900 - 114"	190 - 7"	3525 - 139"	1425 - 56"	1000

Serrat

Carretera nacional 240 km. 149,3
22310 Castejón del Puente (Huesca)-España
Tfno. (+34) 974 417 830
www.serrat.com - comercial@serrat.es



The data presented in this catalog are provided for information purposes only and are not binding.