



EVOLUTION REVERSIBLE SIDE SHIFT


450 POLSER 500 POLSER GIROSTOP SEKURLAST



Mulcher of hammers, for the elimination of remains of pruning up to 8 cm and maintenance of vegetable mantle. Ideal for the regeneration of meadows and grassland. Rotor POLSER of 450 mm of diameter. Excellent results in industrial gardening and maintenance of borders. Its reversible and movable configuration allows to drive the machine well in the rear power lift as in the front in reversible tractors avoiding to tread on the material to mulch.

CHARACTERISTICS

- ▶ Steel-plate chassis, thickness 10 mm.
- ▶ Rotor POLSER of Ø 450/500 mm.
- ▶ Gearbox SERRAT.
- ▶ 3 XPC side belt transmission.
- ▶ Forged agricultural hammers SERRAT.
- ▶ Hammers guaranteed against breakage.
- ▶ GIROSTOP System.
- ▶ Supports of bearing rotor in steel.
- ▶ High speed and high strength bearings.
- ▶ Front protection curtain.
- ▶ Obturations antiwire in rotor.
- ▶ Double bearing on rear roller.
- ▶ Rear height-adjustable roller Ø 180 mm (210 mm from T-2300).
- ▶ PTO 540 rpm.
- ▶ 1000 rpm for front PTO.
- ▶ Rear roller cleaner.
- ▶ Steel counter hammers.
- ▶ Model built under EC Normative.
- ▶ Safety indicators visible to personnel.

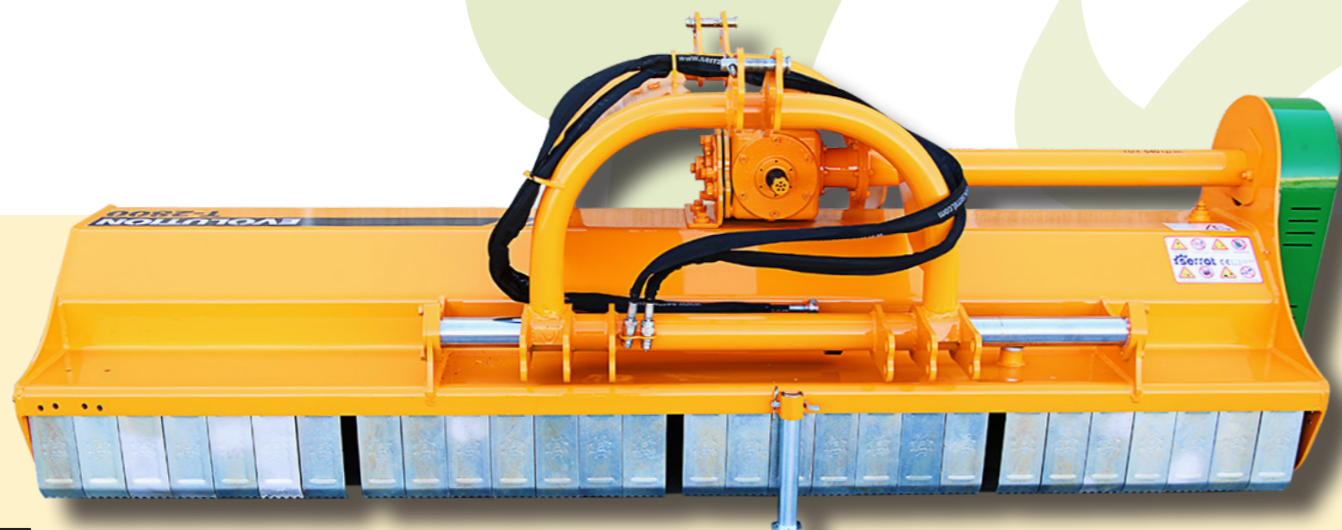

System antiwire in rotor




MODEL	mm	KW-HP	Icon	KG	Nº BELTS TYPE	Diagram							
						A mm	A in	B mm	B in	C mm	C in		
450 POLSER	T-1600	1600	44 - 60 88 - 120	12	810	3 XPC	1790	70"	1450	57"	950	37"	540
	T-1800	1800	48 - 65 88 - 120	16	861	3 XPC	1990	78"	1450	57"	950	37"	540
	T-2000	2000	51 - 70 88 - 120	16	916	3 XPC	2190	86"	1450	57"	950	37"	540
	T-2300	2300	59 - 80 88 - 120	20	1023	3 XPC	2490	98"	1450	57"	950	37"	540
500 POLSER	T-2500	2500	66 - 90 88 - 120	20	1152	3 XPC	2690	106"	1450	57"	980	39"	1000
	T-2800	2800	74 - 100 88 - 120	24	1235	3 XPC	2990	118"	1450	57"	980	39"	1000

OPTIONS



▶ Front skid shoes



▶ Front wheels



▶ Freewheel on sleeve




▶ Front chains



▶ Freewheel on transmission



Carretera nacional 240 km. 149,3
22310 Castejón del Puente (Huesca)-España
Tfno. (+34) 974 417 830
www.serrat.com - comercial@serrat.es

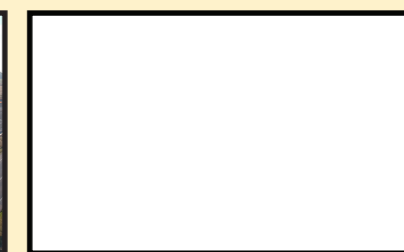

The data presented in this catalog are provided for information purposes only and are not binding.