

Mulcher designed for tractors between 30 HP to 80 HP for the maintenance of vegetable mantle and for the elimination of remains of pruning up to 50 mm.

CHARACTERISTICS


- ▶ Steel-plate chassis, thickness 6 mm.
- ▶ Tubular rotor of Ø 400 mm.
- ▶ Gearbox with freewheel included.
- ▶ 3 XPB side belt transmission.
- ▶ Forged hammers SERRAT special "grass".
- ▶ 2 lines of counter knives screwed in.
- ▶ GIROSTOP System.
- ▶ Supports of bearing rotor in steel.
- ▶ High speed and high strength bearings.
- ▶ PTO 540 rpm.
- ▶ Double bearing on rear roller.
- ▶ Height-adjustable rear roller Ø 180 mm.
- ▶ Turret to be hooked in several positions.
- ▶ Width cover belts 84 mm.
- ▶ Model built under EC Normative.
- ▶ Safety indicators visible to personnel.



Gearbox with freewheel



Rear hood

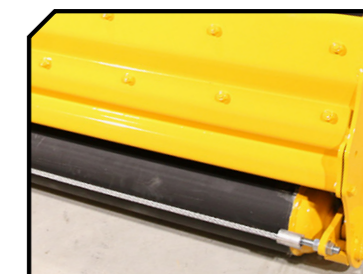

Rear roller

MODEL	mm	KW-HP		KG	N° BELTS TYPE							
						A mm	A in	B mm	B in	C mm	C in	
T-900	900	22 - 30 60 - 80	8	290	3 XPB	1000	39"	1130	44"	1000	39"	540
T-1100	1100	26 - 35 60 - 80	9	340	3 XPB	1200	47"	1130	44"	1000	39"	540
T-1200	1200	30 - 40 60 - 80	9	373	3 XPB	1300	51"	1130	44"	1000	39"	540
T-1400	1400	34 - 45 60 - 80	12	397	3 XPB	1500	59"	1130	44"	1000	39"	540
T-1600	1600	37 - 50 60 - 80	12	420	3 XPB	1600	63"	1130	44"	1000	39"	540
T-1800	1800	45 - 60 60 - 80	16	456	3 XPB	1900	75"	1130	44"	1000	39"	540
T-2000	2000	52 - 70 60 - 80	16	480	3 XPB	2100	83"	1130	44"	1000	39"	540


OPTIONS



▶ Rear gums



▶ Front adjustable skid shoes only for straight side

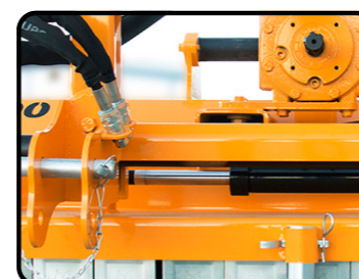

▶ Hydraulic offset



▶ Rear tine retainers



▶ Rounded side



Carretera nacional 240 km. 149,3
22310 Castejón del Puente (Huesca)-España
Tfno. (+34) 974 417 830
www.serrat.com - comercial@serrat.es



The data presented in this catalog are provided for information purposes only and are not binding.