



INTERPIQUET HIGH CUT

SEKURLAST



Mechanically operated vertical axis disc for cutting fruit tree trunks. Up to 150-200 mm in diameter.

Mechanical transmission by power take-off for tractors between 35 and 105 hp.


Requiring a double effect hydraulic's service for the slope and a simple effect service for the hydropneumatic suspension.

CHARACTERISTICS

- ▶ 3 point hitch - cat. II.
- ▶ Cutting width of 850 mm (32 inches) and 1.200 mm (47 inches).
- ▶ Backwardation from the axis of the tractor of 3.100 mm (122 inches).
- ▶ Length for the transport of 3.000 mm (118 inches).
- ▶ 24 tooth HighCut disc.
- ▶ Mechanical transmission by power take-off.
- ▶ Pushing control by hydropneumatic suspension (adjustable).
- ▶ Hydraulic recovery control (adjustable).
- ▶ Hydraulic location according to the necessity activated from the tractor (1 double effect's service).
- ▶ PTO 540 rpm.
- ▶ Rubber sleeve around the plate.
- ▶ Lower bowl of control on the ground.
- ▶ Height adjustable rear wheel.
- ▶ Model built under EC Normative.
- ▶ Safety indicators visible to personnel.



Pushing control by hydropneumatic suspension (adjustable).
Hydraulic recovery control (adjustable).

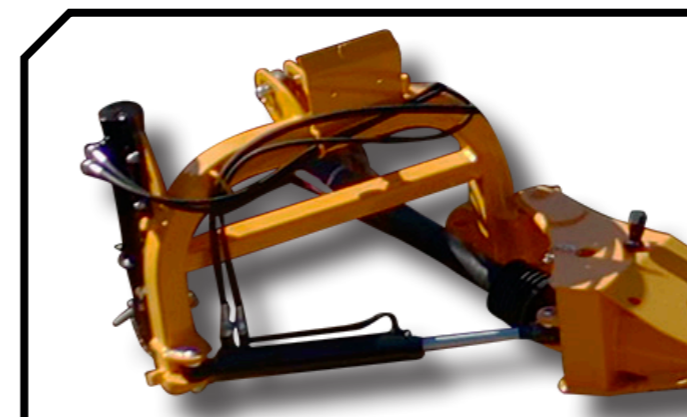

Control wheel of height of work.



MODEL	mm	KW-HP									
	mm	KW-HP		KG	A mm	A in	B mm	B in	C mm	C in	C in
INTERPIQUET	3100	26 - 35 78 - 105	24	540	3000	118"	3100	122"	1200	47"	540



Carretera nacional 240 km. 149,3
22310 Castejón del Puente (Huesca)-España
Tfno. (+34) 974 417 830
www.serrat.com - comercial@serrat.es



The data presented in this catalog are provided for information purposes only and are not binding.