



CHARACTERISTICS

- Steel-plate chassis, thickness 8 mm.
- Rotor POLSER of Ø 650 mm.
- Gearbox SERRAT power up to 150 HP.
- 4 XPC side belt transmission.
- Stamped hammers or Y blades.
- Hammers guaranteed against breakage.
- GIROSTOP System.
- Supports of bearing rotor in steel.
- High speed and high strength bearings.



Mulcher for the mixed utilization in remains of crop of maize, sorghum, sunflower, wheat, barley, etc. As well as, in the preparation for the dried one of herbaceous cultures (ray grass).

In incorporates hydraulic rear gate and turn able nozzles to scatler fresh straw. Rotor POLSER of 650 mm of diameter, equipped with different elements of cut: Y blades or hammers.

Hydraulic rear hood System antiwire in rotor



Rear roller



MODEL	mm	KW-HP			Nº BELTS TYPE	A mm	A in	B mm	B in	C mm	C in	
T-2300	2300	74 - 100 110 - 150	24	80	1255	4 XPC	2545	100"	1750	69"	1200	47" 1000
T-2500	2500	74 - 100 110 - 150	24	80	1310	4 XPC	2745	108"	1750	69"	1200	47" 1000
T-2800	2800	88 - 120 110 - 150	24	80	1395	4 XPC	3045	120"	1750	69"	1200	47" 1000
T-3200	3200	96 - 130 110 - 150	32	96	1527	4 XPC	3445	136"	1750	69"	1200	47" 1000

OPTIONS



► Turn able nozzles



► Hammers



► Y blades



► Front chains



► Freewheel on sleeve




► Front skid shoes



► Adjustable wheels



Carretera nacional 240 km. 149,3
22310 Castejón del Puente (Huesca)-España
Tfno. (+34) 974 417 830
www.serrat.com - comercial@serrat.es

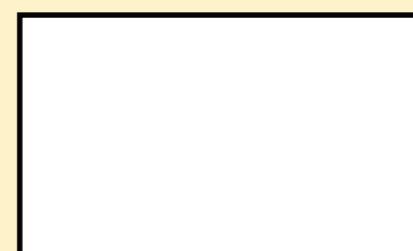

The data presented in this catalog are provided for information purposes only and are not binding.