



Offset Mulcher for works of maintenance in green areas, ways, channels, gardens and agricultural works, for tractors of 35 - 80 HP.

Angulations of work: +90° / -65° and rear hood with two interchangeable positions.

Constructed in materials of high elastic limit, to reduce its weight and to be able to work with tractors of low power.

CHARACTERISTICS

- ▶ Non-wear steel-plate chasis.
- ▶ Rotor tubular of Ø 420 mm.
- ▶ Angulation +90° / -50°.
- ▶ 3 XPB side belt transmission.
- ▶ GIROSTOP System.
- ▶ Stamped hammers SERRAT.
- ▶ Height-adjustable rear roller Ø 180 mm.
- ▶ PTO 540 rpm.
- ▶ Gearbox with freewheel included.
- ▶ Front protection curtain.
- ▶ Hydraulic lateral offset mulcher.
- ▶ Front skid shoes.
- ▶ Model built under EC Normative.
- ▶ Safety indicators visible to personnel.




Angulation:
+90°



-65°




Freewheel on the gearbox

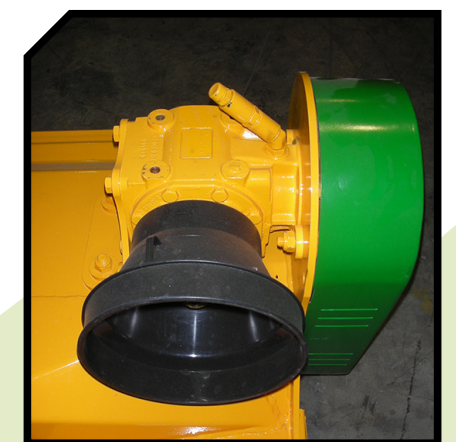

OPTIONS



▶ Homokinetic knot

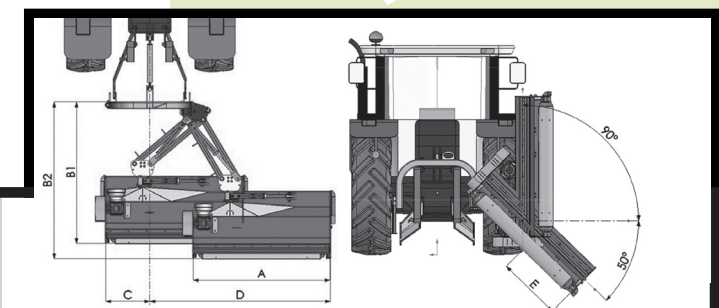

MODEL					Nº BELTS TYPE	A	B1	B2	C	D	E	
	mm	KW-HP				mm-in	mm-in	mm-in	mm-in	mm-in	mm-in	
T-1400	1400	26 - 35 59 - 80	12	445	3 XPB	1400 - 55"	1645 - 65"	1820 - 72"	510 - 20"	1650 - 65"	535 - 21"	1000
T-1600	1600	34 - 45 59 - 80	16	470	3 XPB	1600 - 63"	1645 - 65"	1820 - 72"	510 - 20"	1850 - 73"	735 - 29"	1000
T-1800	1800	37 - 50 59 - 80	16	500	3 XPB	1800 - 71"	1645 - 65"	1820 - 72"	510 - 20"	2050 - 81"	935 - 37"	1000

