




Mulcher with double hydraulic feeder, adapted to cut up residues up to 6-8 cm of diameter in olive trees, citrus fruits, almond trees, walnuts, etc; with interchangeable counter-knives to set the grain size, for tractors between 70 and 120 HP.

### CHARACTERISTICS

- ▶ Steel-plate chassis, thickness 10 mm.
- ▶ Rotor POLSER of Ø 450 mm.
- ▶ Gearbox SERRAT.
- ▶ 3 XPC side belt transmission.
- ▶ Forged agricultural hammers SERRAT.
- ▶ Hammers guaranteed against breakage.
- ▶ Feeder with system BRALAKC.
- ▶ High torque hydraulic motor reversible.
- ▶ Supports of bearing rotor in steel.
- ▶ High speed and high strength bearings.
- ▶ PTO 1.000 rpm.
- ▶ Rear height-adjustable roller Ø 180 mm.
- ▶ Triple feed chain.
- ▶ GIROSTOP System.
- ▶ Double bearing on rear roller.
- ▶ Reversible toothed rear screen.
- ▶ Model built under EC Normative.
- ▶ Safety indicators visible to personnel.

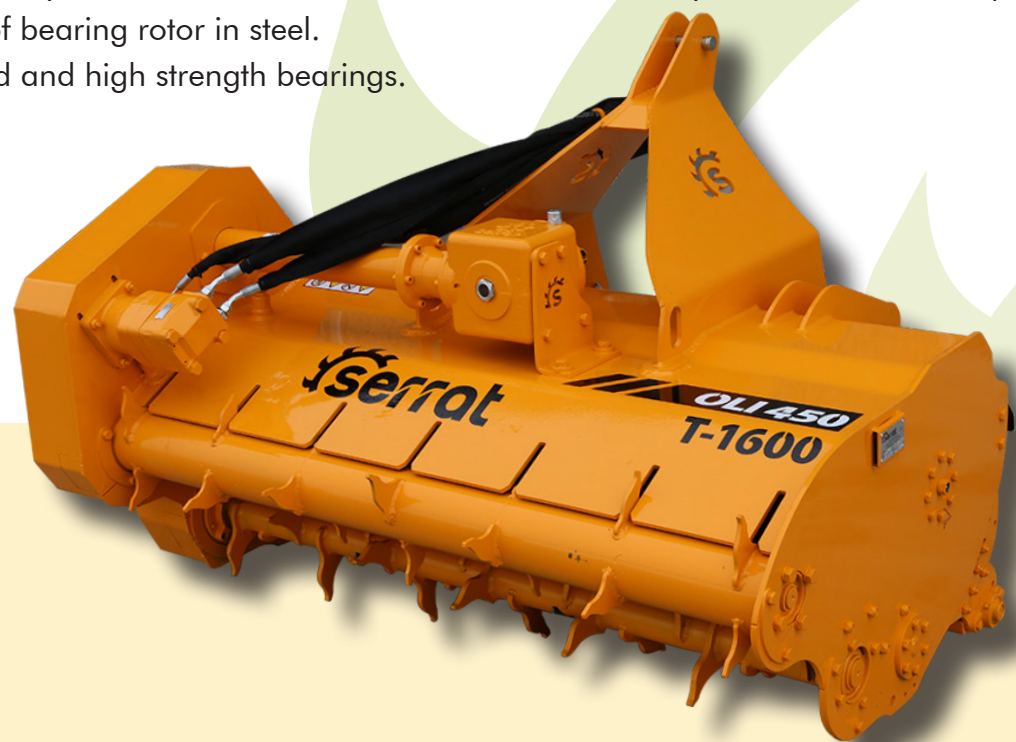

### Feeder Bralack



### Screen replaceable rear gear



MODEL	mm	KW-HP	kg	N° BELTS TYPE	Diagram							
					A mm	A in	B mm	B in	C mm	C in		
T-1600	1600	45 - 60 88 - 120	12	1059	3 XPC	1815	71"	1245	49"	1215	48"	1000
T-1800	1800	60 - 80 88 - 120	16	1147	3 XPC	2015	79"	1245	49"	1215	48"	1000
T-2000	2000	75 - 100 88 - 120	16	1222	3 XPC	2215	87"	1245	49"	1215	48"	1000

### OPTIONS



- ▶ Freewheel on sleeve
- ▶ Preparation for front lift (gearbox)
- ▶ Rear wheels



Carretera nacional 240 km. 149,3  
22310 Castejón del Puente (Huesca)-España  
Tfno. (+34) 974 417 830  
www.serrat.com - comercial@serrat.es



The data presented in this catalog are provided for information purposes only and are not binding.