



PRO + REVERSIBLE SIDE SHIFT

SEKURLAST
550 POLSER GIROSTOP > <




Mulcher for extensive agriculture (maize, sorghum, sunflower, cotton and all kinds of plant residue). It incorporates rotor POLSER which, thanks to its diameter, is capable of generating a great aspiration and raising the material from the furrow. Ideal for the regeneration of meadows and grasslands.

Its reversible and movable configuration allows to protect the tractor avoiding to tread on the material to mulch and fits laterally the work camp by a hydraulic cylinder.

CHARACTERISTICS

- Steel-plate chassis, thickness 10 mm.
- Rotor POLSER of Ø 550 mm.
- Gearbox SERRAT.
- 4 XPC side belt transmission.
- Stamped hammers or Y blades.
- Hammers guaranteed against breakage.
- GIROSTOP System.
- Supports of bearing rotor in steel.
- High speed and high strength bearings.
- Front protection curtain.
- Obturations antiwire in rotor.
- Double bearing on rear roller.
- Rear height-adjustable roller.
- PTO 1.000 rpm.
- 3 lines of counter hammers.
- Model built under EC Normative.
- Safety indicators visible to personnel.

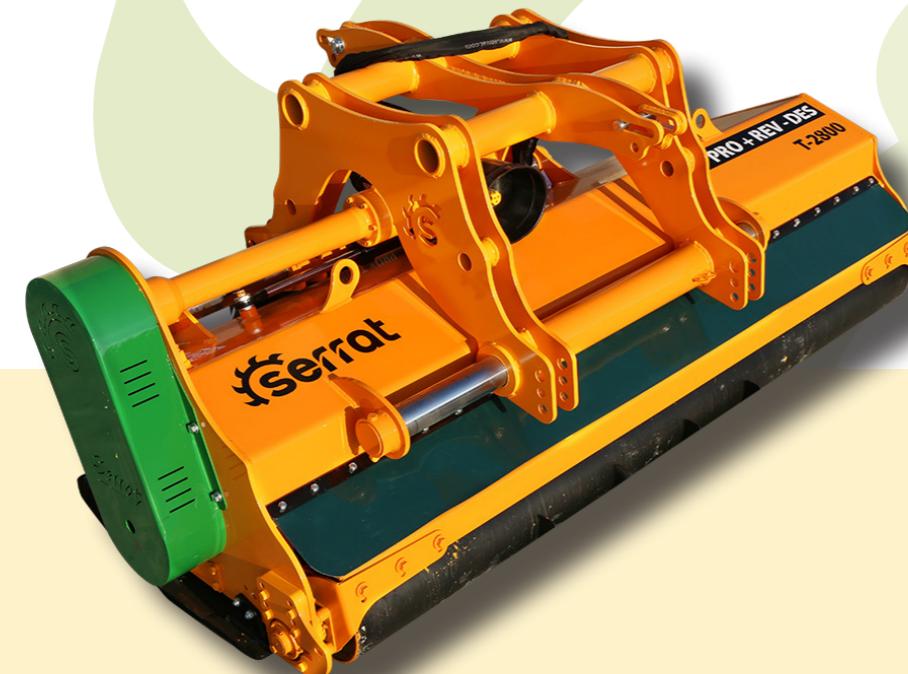

System antiwire in rotor



Rear roller




MODEL	mm	KW-HP		Nº BELTS TYPE	A mm		A in		B mm		B in		C mm		C in	
					A	B	C	D	E	F	G	H	I	J	K	L
T-2300	2300	66 - 90 110 - 150	20	1628	4 XPC	2553	100"	1434	56"	1200	47"	540				
T-2500	2500	74 - 100 110 - 150	20	1690	4 XPC	2753	108"	1434	56"	1200	47"	540				
T-2800	2800	81 - 110 110 - 150	28	1797	4 XPC	3053	120"	1434	56"	1200	47"	1000				
T-3200	3200	96 - 130 110 - 150	32	1925	4 XPC	3453	136"	1434	56"	1200	47"	1000				

OPTIONS



► Front gums

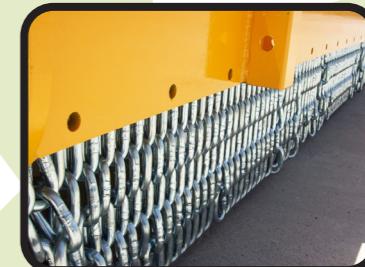

► Front chains



► Freewheel on sleeve



► Front skid shoes



Carretera nacional 240 km. 149,3
22310 Castejón del Puente (Huesca)-España
Tfno. (+34) 974 417 830
www.serrat.com - comercial@serrat.es



The data presented in this catalog are provided for information purposes only and are not binding.