



TRIGON
SIDE SHIFT

GIROSTOP

SEKURLAST




Mulcher to the service of the fruit sector, for the elimination of prunings and agricultural residues, as well as, for the maintenance of green spaces.

His composition moveable (parallelogram) allows the tractor to circulate along the center of the street and to the machine to produce the vegetable mantle next to the tree.

The height of this mulcher is 420 mm.

CHARACTERISTICS

- Steel-plate chassis, thickness 8 mm.
 - Tubular rotor of Ø 420 mm.
 - Gearbox SERRAT.
 - 3 XPC side belt transmission.
 - Forged agricultural hammers SERRAT.
 - Hammers guaranteed against breakage.
 - GIROSTOP System.
 - Supports of bearing rotor in steel.
 - High speed and high strength bearings.
 - Front protection curtain.
- Obturations antiwire in rotor.
 - Double bearing on rear roller.
 - Rear height-adjustable roller Ø 180 mm.
 - PTO 540 rpm.
 - Rear roller cleaner.
 - Steel counter hammers.
 - Model built under EC Normative.
 - Safety indicators visible to personnel.

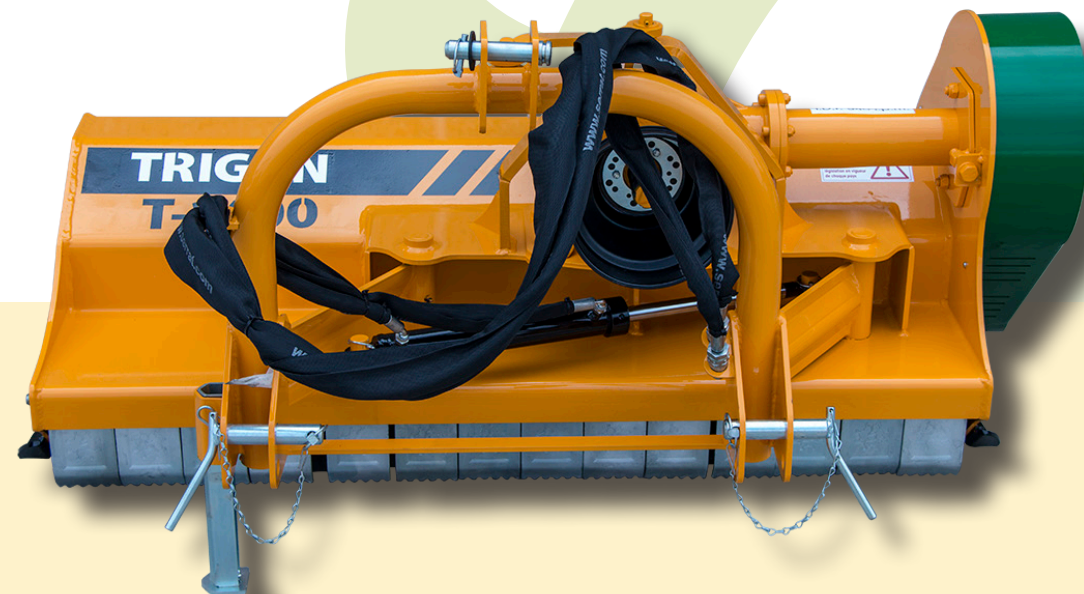







Moveable hooking



System antiwire in rotor



MODEL	 mm	 KW-HP			Nº BELTS TYPE							
						A mm	A in	B mm	B in	C mm	C in	
T-1100	1100	29 - 40 59 - 80	8	438	3 XPC	1317	52"	1270	50"	867	34"	540
T-1250	1250	33 - 45 59 - 80	12	472	3 XPC	1441	57"	1270	50"	867	34"	540
T-1400	1400	37 - 50 59 - 80	12	495	3 XPC	1591	63"	1270	50"	867	34"	540
T-1600	1600	40 - 55 59 - 80	12	525	3 XPC	1791	71"	1270	50"	867	34"	540
T-1800	1800	44 - 60 59 - 80	16	571	3 XPC	1991	78"	1270	50"	867	34"	540
T-2000	2000	51 - 70 59 - 80	16	601	3 XPC	2191	86"	1270	50"	867	34"	540

OPTIONS



► Front skid shoes



► Front wheels



► Freewheel on sleeve



► Front chains



► Freewheel on transmission



Carretera nacional 240 km. 149,3
22310 Castejón del Puente (Huesca)-España
Tfno. (+34) 974 417 830
www.serrat.com - comercial@serrat.es



The data presented in this catalog are provided for information purposes only and are not binding.