



EVOLUTION SIDE SHIFT WITH REAR HOOD




Mulcher of hammers, for the elimination of remains of pruning up to 8 cm and maintenance of vegetable mantle. Ideal for the regeneration of meadows and grassland.

Rotor POLSER of 480 mm of diameter. Excellent results in industrial gardening and maintenance of borders.


CHARACTERISTICS

- ▶ Steel-plate chassis, thickness 10 mm.
- ▶ Rotor POLSER of Ø 450 mm.
- ▶ Gearbox SERRAT.
- ▶ 3 XPC side belt transmission.
- ▶ Forged agricultural hammers SERRAT.
- ▶ Hammers guaranteed against breakage.
- ▶ GIROSTOP System.
- ▶ Supports of bearing rotor in steel.
- ▶ High speed and high strength bearings.
- ▶ Front protection curtain.
- ▶ Obturations antiwire in rotor.
- ▶ Double bearing on rear roller.
- ▶ Rear height-adjustable roller Ø 180 mm.
- ▶ PTO 540 rpm.
- ▶ Rear roller cleaner.
- ▶ Steel counter hammers.
- ▶ Rear hydraulic hood with sieve.
- ▶ Front skid shoes.
- ▶ Model built under EC Normative.
- ▶ Safety indicators visible to personnel.

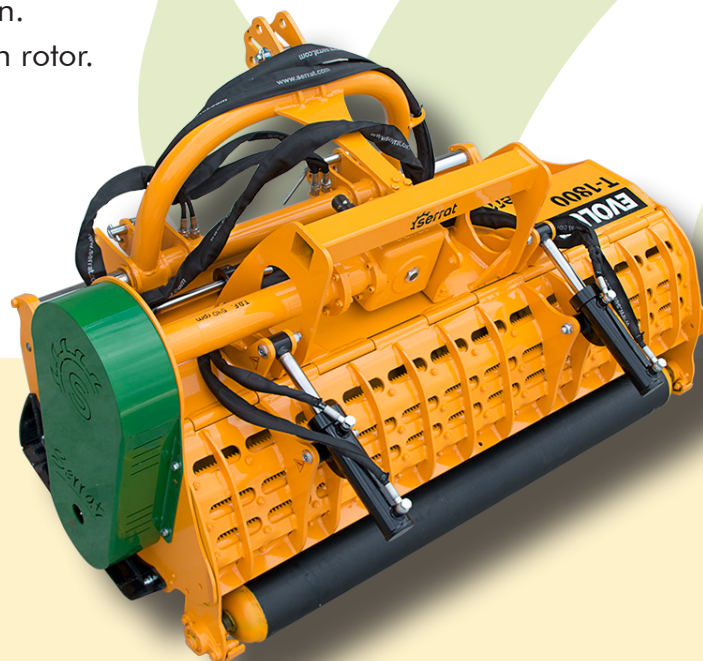

System antiwire in rotor



MODEL	 mm	 KW-HP		 KG	Nº BELTS TYPE							
						A mm	A in	B mm	B in	C mm	C in	
T-1400	1400	44 - 60 88 - 120	12	640	3 XPC	1570	62"	1205	47"	950	37"	540
T-1600	1600	48 - 65 88 - 120	12	678	3 XPC	1790	70"	1205	47"	1040	41"	540
T-1800	1800	51 - 70 88 - 120	16	730	3 XPC	1990	78"	1205	47"	1040	41"	540
T-2000	2000	55 - 75 88 - 120	16	782	3 XPC	2190	86"	1205	47"	1040	41"	540
T-2100	2100	59 - 80 88 - 120	20	802	3 XPC	2490	98"	1205	47"	1040	41"	540
T-2300	2300	63 - 85 88 - 120	20	889	3 XPC	2690	106"	1205	47"	1040	41"	540

OPTIONS



▶ Freewheel on sleeve



▶ Freewheel on transmission



Carretera nacional 240 km. 149,3
22310 Castejón del Puente (Huesca)-España
Tfno. (+34) 974 417 830
www.serrat.com - comercial@serrat.es



The data presented in this catalog are provided for information purposes only and are not binding.