



EVOLUTION FIXED WITH REAR HOOD



Mulcher of hammers, for the elimination of remains of pruning up to 8 cm and maintenance of vegetable mantle. Ideal for the regeneration of meadows and grassland.

Rotor POLSER of 480 mm of diameter. Excellent results in industrial gardening and maintenance of borders.

Its fixed configuration allows to choose the position of the gearbox to reach the work camp and that the transmission works straight line.

CHARACTERISTICS

- ▶ Steel-plate chassis, thickness 10 mm.
- ▶ Rotor POLSER of Ø 450 mm.
- ▶ Gearbox SERRAT.
- ▶ 3 XPC side belt transmission.
- ▶ Forged agricultural hammers SERRAT.
- ▶ Hammers guaranteed against breakage.
- ▶ GIROSTOP System.
- ▶ Supports of bearing rotor in steel.
- ▶ High speed and high strength bearings.
- ▶ Front protection curtain.
- ▶ Obturations antiwire in rotor.
- ▶ Double bearing on rear roller.
- ▶ Rear height-adjustable roller Ø 180 mm.
- ▶ PTO 540 rpm.
- ▶ Rear roller cleaner.
- ▶ Steel counter hammers.
- ▶ Rear hydraulic hood with sieve.
- ▶ Front skid shoes.
- ▶ Model built under EC Normative.
- ▶ Safety indicators visible to personnel.



System antiwire in rotor




MODEL					Nº BELTS TYPE							
						A mm	A in	B mm	B in	C mm	C in	
T-1600	1600	40 - 55 88 - 120	12	612	3 XPC	1790	70"	1180	46"	1000	39"	540
T-1800	1800	44 - 60 88 - 120	16	662	3 XPC	1990	78"	1180	46"	1000	39"	540
T-2000	2000	51 - 70 88 - 120	16	708	3 XPC	2190	86"	1230	48"	1000	39"	540
T-2300	2300	59 - 80 88 - 120	20	812	3 XPC	2490	98"	1230	48"	1000	39"	540

OPTIONS



▶ Freewheel on sleeve

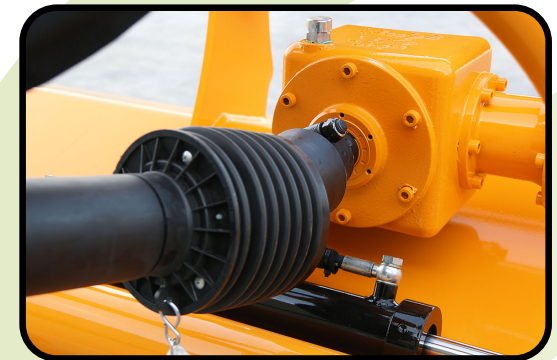

▶ Freewheel on transmission



Carretera nacional 240 km. 149,3
22310 Castejón del Puente (Huesca)-España
Tfno. (+34) 974 417 830
www.serrat.com - comercial@serrat.es



The data presented in this catalog are provided for information purposes only and are not binding.