



Mulcher with reversible hydraulic feeder, ideal for pruning of olive trees, citrus trees and nuts.

Adapted to crush residues from 6-8 cm of diameter, with the rotor ÓCLAME of SERRAT which is adapted for tractors between 70 and 110 HP.

It works in reverse to preserve the tractor for doesn't pass at the top of the branches.

## CHARACTERISTICS


- ▶ Steel-plate chassis, thickness 8 mm.
- ▶ Rotor ÓCLAME of Ø 450 mm.
- ▶ Gearbox SERRAT for tractors between 70 and 110 HP.
- ▶ 3 XPC side belt transmission.
- ▶ Treated blades.
- ▶ Feeder with system BRALAKC.
- ▶ High torque hydraulic motor reversible.
- ▶ Supports of bearing rotor in steel.
- ▶ High speed and high strength bearings.
- ▶ PTO 1.000 rpm.
- ▶ Double bearing on rear roller.
- ▶ Triple feed chain.
- ▶ Model built under EC Normative.
- ▶ Safety indicators visible to personnel.









Feeder Bralake

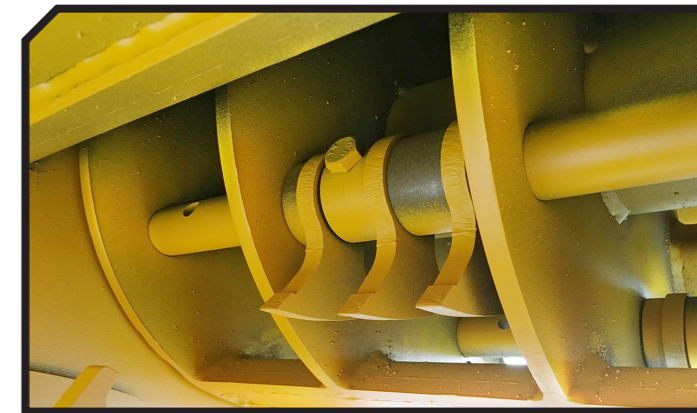

Rotor Óclame Technology



MODEL	 mm	 KW-HP			Nº BELTS TYPE							
						A mm	A in	B mm	B in	C mm	C in	
T-1600	1600	52 - 70 82 - 110	66	1108	3 XPC	1855	73"	1235	49"	1215	48"	1000
T-1800	1800	60 - 80 82 - 110	78	1200	3 XPC	2055	81"	1235	49"	1215	48"	1000
T-2000	2000	67 - 90 82 - 110	84	1286	3 XPC	2255	81"	1235	49"	1215	48"	1000

## OPTIONS



▶ Freewheel on sleeve



▶ Steering Wheels



Carretera nacional 240 km. 149,3  
22310 Castejón del Puente (Huesca)-España  
Tfno. (+34) 974 417 830  
www.serrat.com - comercial@serrat.es



The data presented in this catalog are provided for information purposes only and are not binding.