


# Serrat

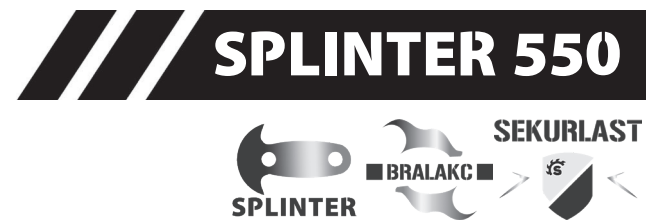

Mulcher with reversible hydraulic feeder, ideal for pruning of olive trees, citrus trees and nuts.

Adapted to crush residues from 100 mm of diameter, with the rotor SPLINTER of SERRAT which is adapted for tractors between 90 and 170 HP.

It works in reverse to preserve the tractor for doesn't pass at the top of the branches.

## CHARACTERISTICS

- ▶ Steel-plate chassis, thickness 8 mm.
- ▶ Rotor with SPLINTER technology of Ø 550 mm.
- ▶ Gearbox SERRAT for tractors between 90 and 170 HP.
- ▶ 4 XPC side belt transmission.
- ▶ Treated blades.
- ▶ Feeder with system BRALAKC.
- ▶ High torque hydraulic motor reversible.
- ▶ Supports of bearing rotor in steel.
- ▶ High speed and high strength bearings.
- ▶ PTO 1.000 rpm (170 HP).
- ▶ Double bearing on rear roller.
- ▶ Triple feed chain.
- ▶ 3 lines of counter knives screwed.
- ▶ Ground-control rear fixed wheels.
- ▶ Model built under EC Normative.
- ▶ Safety indicators visible to personnel.



3 lines of counter knives screwed



Rotor with SPLINTER technology




Rear wheels



MODEL	mm	KW-HP	kg	Nº BELTS TYPE	Diagram							
					A mm	A in	B mm	B in	C mm	C in		
T-1800	1800	67 - 90 112 - 150	42	1570	4 XPC	2240	88"	1560	61"	1290	51"	1000
T-2000	2000	74 - 100 112 - 150	48	1800	4 XPC	2440	96"	1560	61"	1290	51"	1000
T-2300	2300	82 - 110 112 - 150	54	2000	4 XPC	2740	108"	1560	61"	1290	51"	1000

## OPTIONS

▶ Freewheel




▶ Hidrahelp



▶ Rear roller

# Serrat

Carretera nacional 240 km. 149,3  
22310 Castejón del Puente (Huesca) – España  
Tfno. (+34) 974 417 830  
www.serrat.com – comercial@serrat.es



The data presented in this catalog are provided for information purposes only and are not binding.