



Soil preparation machine up to a depth of 120-150 mm, for tractors with Vario between 80 - 120 HP. Transforms forest land, with stumps and rocks, in land for cultivation avoiding accidents in later processes.


CHARACTERISTICS

- ▶ Steel-plate chassis, thickness 8 mm.
- ▶ Rotor FIXE TOP of Ø 470 mm.
- ▶ Gearbox SERRAT for 120 HP.
- ▶ 4 XPC belt transmission.
- ▶ Supports of bearing rotor in steel.
- ▶ Oscillating bearings of double row of rollers.
- ▶ PTO 540 rpm.
- ▶ Rear hydraulic hood.
- ▶ Chassis internal reinforcements.
- ▶ System antiwire in rotor.
- ▶ Compact drive cover.
- ▶ Raer roller into the hood.
- ▶ Model built under EC Normative.
- ▶ Safety indicators visible to personnel.





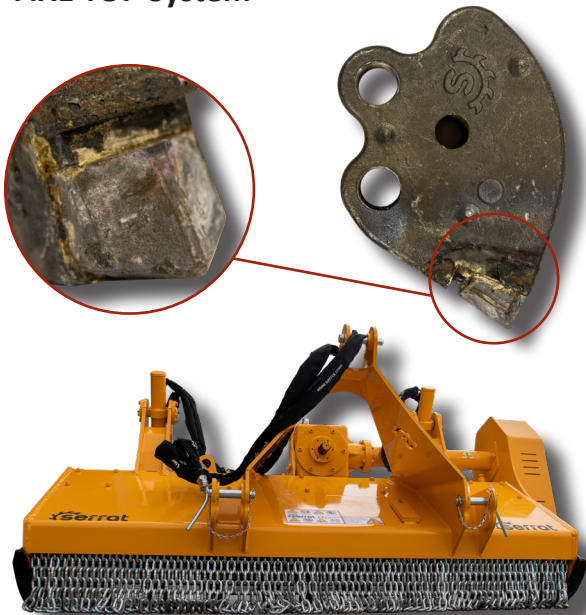



Rear hydraulic hood
Compact drive cover

FIXE TOP System



*For working in depth it is recommended that the tractor has a Creeper or Vario

MODEL					Nº BELTS TYPE							
						A mm	A in	B mm	B in	C mm	C in	
T-1200	1200	59 - 80 75 - 100	30	870	4 XPC	1420	56"	1415	60"	950	66"	540
T-1400	1400	59 - 80 75 - 100	36	1015	4 XPC	1620	64"	1415	60"	950	66"	540
T-1600	1600	59 - 80 75 - 100	42	1160	4 XPC	1820	72"	1415	60"	950	66"	540
T-1800	1800	59 - 80 88 - 120	48	1300	4 XPC	2020	80"	1415	60"	950	66"	540
T-2000	2000	59 - 80 88 - 120	50	1450	4 XPC	2220	87"	1415	60"	950	66"	540

OPTIONS

► Centralized greasing



Carretera nacional 240 km. 149,3
22310 Castejón del Puente (Huesca)– España
Tfno. (+34) 974 417 830
www.serrat.com – comercial@serrat.es



The data presented in this catalog are provided for information purposes only and are not binding.