



FIXE TOP



Soil preparation machine up to a depth of 180 mm, for tractors between 100 - 150 HP. Transforms forest land, with stumps and rocks, in land for cultivation avoiding accidents in later processes.


CHARACTERISTICS

- ▶ Steel-plate chassis, thickness 10 mm.
- ▶ Rotor FIXE TOP of Ø 550 mm.
- ▶ Gearbox SERRAT for 150 HP.
- ▶ 5 XPC belt transmission.
- ▶ Supports of bearing rotor in steel.
- ▶ Oscillating bearings of double row of rollers.
- ▶ PTO 540 rpm.
- ▶ Rear hydraulic hood.
- ▶ Chassis internal reinforcements.
- ▶ System antiwire in rotor.
- ▶ Compact drive cover.
- ▶ Raer roller into the hood.
- ▶ Model built under EC Normative.
- ▶ Safety indicators visible to personnel.





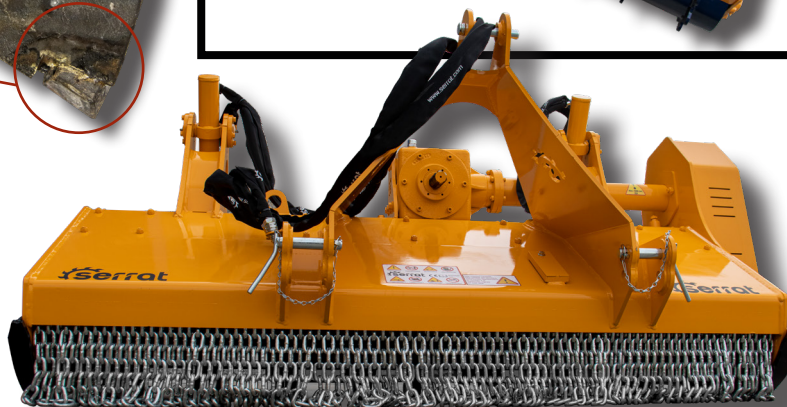



Rear hydraulic hood
Compact drive cover

FIXE TOP System



*For working in depth it is recommended that the tractor has a Creeper or Vario

MODEL					Nº BELTS TYPE							
	mm	KW-HP				A mm	A in	B mm	B in	C mm	C in	
T-1600	1600	74 - 100 97 - 130	40	1260	5 XPC	1880	74"	1340	53"	1010	40"	540
T-1800	1800	74 - 100 97 - 130	45	1353	5 XPC	2080	82"	1340	53"	1010	40"	540
T-2000	2000	74 - 100 112 - 150	50	1425	5 XPC	2280	90"	1340	53"	1010	40"	540


OPTIONS

► Centralized greasing



serrat

Carretera nacional 240 km. 149,3
22310 Castejón del Puente (Huesca) – España
Tfno. (+34) 974 417 830
www.serrat.com – comercial@serrat.es



The data presented in this catalog are provided for information purposes only and are not binding.