



Soil preparation machine up to a depth of 500 mm, for tractors between 300 - 600 HP. Transforms forest land, with stumps and rocks, in land for cultivation avoiding accidents in later processes.

CHARACTERISTICS

- ▶ Steel-plate chassis, thickness 12 mm.
- ▶ Rotor FIXE TOP of Ø 700 mm.
- ▶ Centralising greasing system
- ▶ Gearbox SERRAT for 600 HP with Synkrodos-600.
- ▶ Double synchronous belt transmission.
- ▶ Supports of bearing rotor in steel.
- ▶ Oscillating bearings of double row of rollers.
- ▶ PTO 1.000 rpm.
- ▶ Rear hydraulic hood.
- ▶ Chassis internal reinforcements.
- ▶ Anvil interchangeable.
- ▶ System antiwire in rotor.
- ▶ Compact drive cover.
- ▶ Hydraulic levelling roller.
- ▶ Model built under EC Normative.
- ▶ Safety indicators visible to personnel.

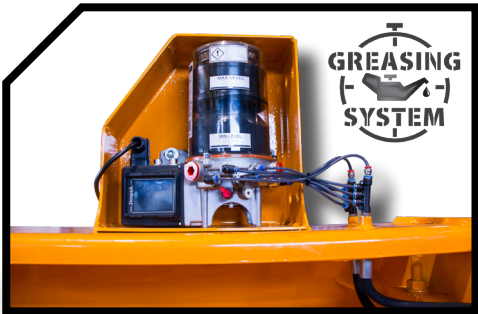


Rear hydraulic hood
Compact drive cover







FIXE TOP System



Centralized greasing



*For working in depth it is recommended that the tractor has a Creeper or Vario

MODEL					Nº BELTS TYPE							
	mm	KW-HP				A mm	A in	B mm	B in	C mm	C in	
T-2500	2500	223 -300 447 -600	58	5000	2 Synchronous	2890	114"	2400	94"	1610	63"	1000

serrat
Carretera nacional 240 km. 149,3
22310 Castejón del Puente (Huesca)– España
Tfno. (+34) 974 417 830
www.serrat.com – comercial@serrat.es



The data presented in this catalog are provided for information purposes only and are not binding.