

serrat

TRIGON REVERSIBLE SIDE SHIFT




Mulcher to the service of the fruit sector, for the elimination of prunings and agricultural residues, as well as, for the maintenance of green spaces.


Its reversible and movable composition allows to drive the machine in the front of the tractor or in the rear power lift for reversible tractors, avoiding to tread on the material to mulch.

CHARACTERISTICS


- ▶ Steel-plate chassis, thickness 8 mm.
- ▶ Tubular rotor of Ø 420 mm.
- ▶ Gearbox SERRAT.
- ▶ 3 XPC side belt transmission.
- ▶ Forged agricultural hammers SERRAT.
- ▶ Hammers guaranteed against breakage.
- ▶ GIROSTOP system into the bolt of the hammer.
- ▶ Supports of bearing rotor in steel.
- ▶ High speed and high strength bearings.
- ▶ Front protection curtain.
- ▶ System antiwire in rotor.
- ▶ Double bearing on rear roller.
- ▶ Rear height-adjustable roller Ø 180 mm.
- ▶ PTO 540 rpm.
- ▶ Rear roller cleaner.
- ▶ Steel counter hammers.
- ▶ Model built under EC Normative.
- ▶ Safety indicators visible to personnel.

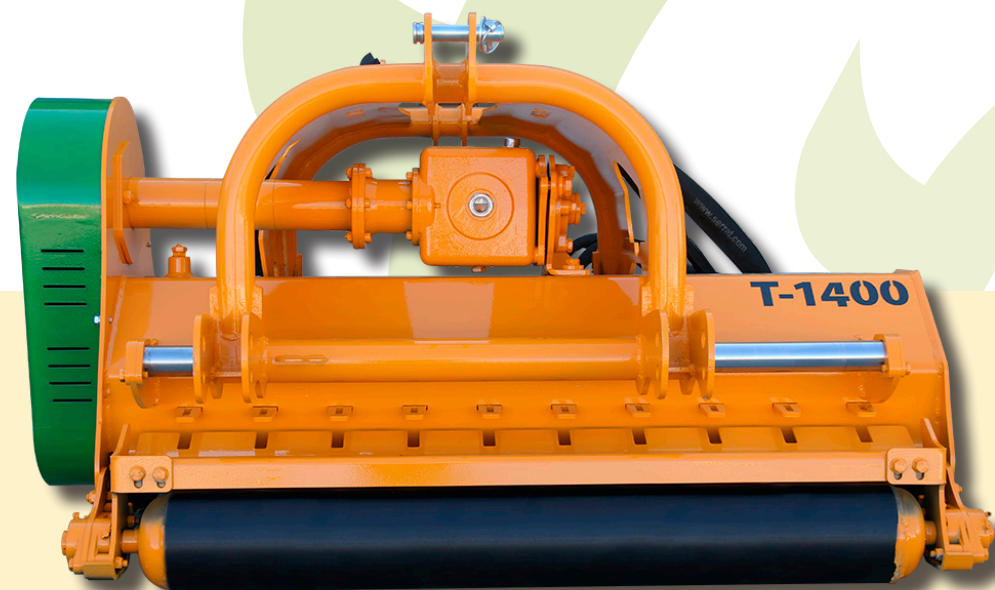

Reversible and moveable hooking

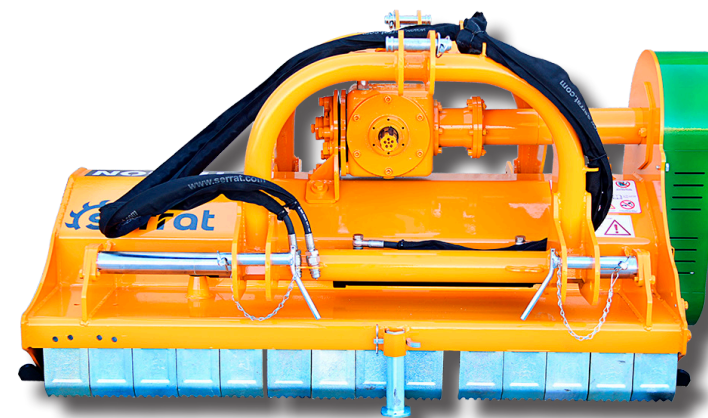

System antiwire in rotor

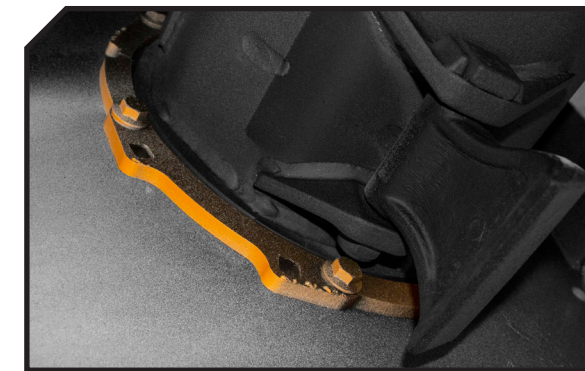


MODEL

MODEL	mm	KW-HP	kg	Nº BELTS TYPE	Diagram							
					A mm	A in	B mm	B in	C mm	C in		
T-1400	1400	37 - 50 59 - 80	12	600	3 XPC	1591	63"	1196	47"	867	34"	540
T-1600	1600	40 - 55 59 - 80	12	630	3 XPC	1791	71"	1196	47"	867	34"	540
T-1800	1800	44 - 60 59 - 80	16	672	3 XPC	1991	78"	1196	47"	867	34"	540
T-2000	2000	51 - 70 59 - 80	16	703	3 XPC	2191	86"	1196	47"	867	34"	540

OPTIONS

▶ Gearbox 1.000 RPM for front PTO

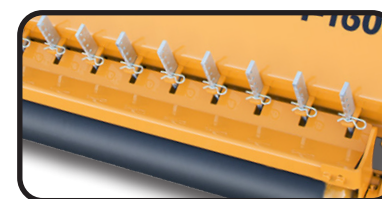

▶ Rear tine retainers



▶ Front chains

▶ Rear wheels




▶ Front adjustable skid shoes



▶ Front wheels

serrat

Carretera nacional 240 km. 149,3
22310 Castejón del Puente (Huesca)-España
Tfno. (+34) 974 417 830
www.serrat.com - comercial@serrat.es

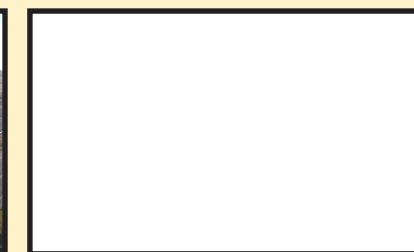

The data presented in this catalog are provided for information purposes only and are not binding.