

serrat

IBP FRONTAL



Mulcher designed for tractors between 30 HP to 80 HP for the maintenance of vegetable mantle and for the elimination of remains of pruning up to 50 mm.


Special configuration for frontal works.

CHARACTERISTICS

- ▶ Steel-plate chassis, thickness 6 mm.
- ▶ Tubular rotor of Ø 400 mm.
- ▶ Gearbox with freewheel included.
- ▶ 4 XPB side belt transmission.
- ▶ Forged hammers SERRAT special "grass".
- ▶ 2 lines of counter knives screwed.
- ▶ GIROSTOP system into the bolt of the hammer.
- ▶ Supports of bearing rotor in steel.
- ▶ High speed and high strength bearings.
- ▶ Rear height-adjustable roller Ø 180 mm.
- ▶ Double bearing on rear roller.
- ▶ Rear gum over the roller.
- ▶ Hydraulic front hood.
- ▶ PTO 540 rpm.
- ▶ Model built under EC Normative.
- ▶ Safety indicators visible to personnel.



Rear gum over the roller

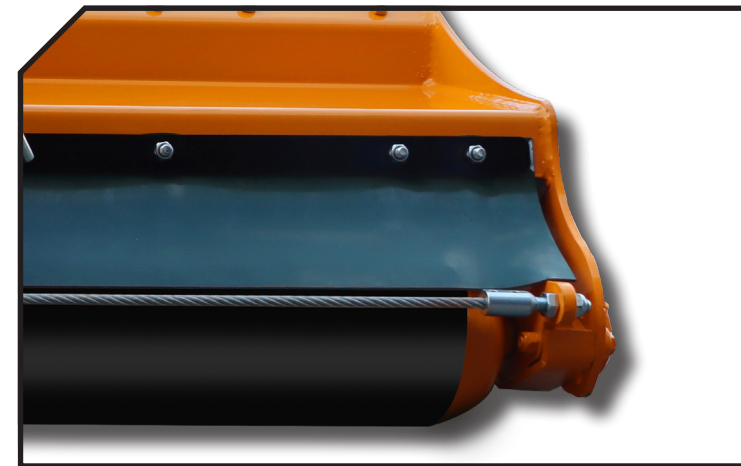

MODEL	mm	KW-HP	Icon	KG	Nº BELTS TYPE	Dimensions						
						A mm	A in	B mm	B in	C mm	C in	
T-1300	1300	22 - 30 60 - 80	9	370	4XPB	1495	59"	1155	45"	840	33"	540
T-1400	1400	30 - 40 60 - 80	12	397	4XPB	1595	63"	1155	45"	840	33"	540
T-1600	1600	37 - 50 60 - 80	12	420	4XPB	1795	71"	1155	45"	840	33"	540
T-1800	1800	45 - 60 60 - 80	16	456	4XPB	1995	79"	1155	45"	840	33"	540
T-2000	2000	52 - 70 60 - 80	16	480	4XPB	2195	79"	1155	45"	840	33"	540


OPTIONS



- ▶ Configuration for radio-controlled Tool Carrier
- ▶ Hydraulic side shift
- ▶ Hooking

serrat

Carretera nacional 240 km. 149,3
22310 Castejón del Puente (Huesca)-España
Tfno. (+34) 974 417 830
www.serrat.com - comercial@serrat.es



The data presented in this catalog are provided for information purposes only and are not binding.