

Mulcher with reversible hydraulic feeder, ideal for pruning of olive trees, citrus trees and nuts.

Adapted to crush residues from 60 mm of diameter, with the rotor SPLINTER of SERRAT which is adapted for tractors between 60 and 120 HP.


It works in reverse to preserve the tractor for doesn't pass at the top of the branches.

CHARACTERISTICS

- ▶ Steel-plate chassis, thickness 8 mm.
- ▶ Rotor with SPLINTER technology of Ø 350 mm.
- ▶ Gearbox SERRAT for tractors between 60 and 120 HP.
- ▶ 3 XPC side belt transmission.
- ▶ Treated blades.
- ▶ Feeder with system BRALAKC.
- ▶ High torque hydraulic motor reversible.
- ▶ Supports of bearing rotor in steel.
- ▶ High speed and high strength bearings.
- ▶ PTO 540 rpm (110 HP).
- ▶ Triple feed chain.
- ▶ 3 lines of counter knives screwed.
- ▶ Ground-control rear fixed wheels.
- ▶ Model built under EC Normative.
- ▶ Safety indicators visible to personnel.




3 lines of counter knives screwed

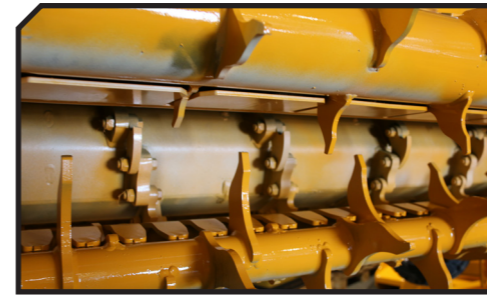

Rotor with SPLINTER technology




Rear wheels

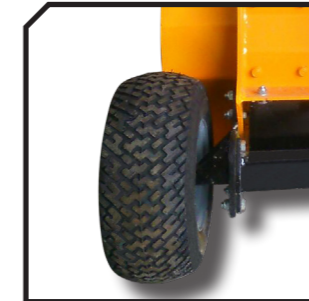

MODEL	mm	KW-HP	PTO	KG	Nº BELTS TYPE	Rotor Dimensions						mm
						A mm	A in	B mm	B in	C mm	C in	
T-1300	1300	45 - 60 88 - 120	37	850	3 XPC	1740	69"	1415	56"	1080	43"	540
T-1500	1500	52 - 70 88 - 120	43	960	3 XPC	1940	76"	1415	56"	1080	43"	540
T-1700	1700	60 - 80 88 - 120	48	1040	3 XPC	2140	84"	1415	56"	1080	43"	540

OPTIONS

- ▶ Freewheel
- ▶ Reversible




▶ Hidrahelp



▶ Rear roller



Carretera nacional 240 km. 149,3
22310 Castejón del Puente (Huesca)-España
Tfno. (+34) 974 417 830
www.serrat.com - comercial@serrat.es



The data presented in this catalog are provided for information purposes only and are not binding.