



Mulcher with reversible hydraulic feeder, ideal for pruning of vineyard, dessert grapes, chestnut-trees, olive trees, almond-trees, citrus fruits, walnuts, hazels, etc.

For tractors between 60 and 120 HP. Machine for demanding works, with need to deposit very thin remains in the area, avoiding possible plagues and helping to their elimination, for later processes.

It has a rotor of crenellated cleavers, crossing with fixed palate.

CHARACTERISTICS


- ▶ Steel-plate chassis, thickness 10 mm.
- ▶ Rotor with system RHENDUEL of Ø 450 mm.
- ▶ Power of tractor between 60 - 120 HP.
- ▶ 3 XPC side belt transmission.
- ▶ Treated blades.
- ▶ Feeder with system BRALAKC.
- ▶ High torque hydraulic motor reversible.
- ▶ Supports of bearing rotor in steel.
- ▶ High speed and high strength bearings.
- ▶ PTO 540 rpm (1,000 rpm from T-2000).
- ▶ Double bearing on rear roller.
- ▶ Triple feed chain.
- ▶ Double lines of counter hammers RHENDUEL.
- ▶ Model built under EC Normative.
- ▶ Safety indicators visible to personnel.



Feeder BRALAKC



Triple feed chain

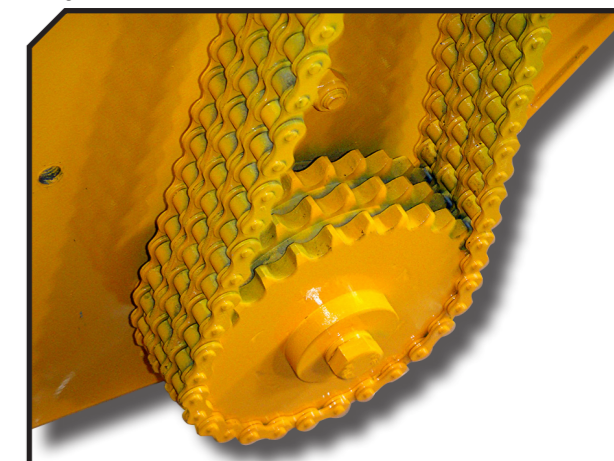

MODEL

MODEL	mm	KW-HP	RHENDUEL	KG	Nº BELTS TYPE	Diagram Dimensions						
						A mm	A in	B mm	B in	C mm	C in	
T-1600	1600	44 - 60 88 - 120	4 x 8	1356	3 XPC	1835	72"	1197	47"	1185	47"	540
T-1800	1800	60 - 80 88 - 120	4 x 9	1475	3 XPC	2037	80"	1197	47"	1185	47"	540
T-2000	2000	75 - 100 88 - 120	4 x 10	1590	3 XPC	2235	88"	1197	47"	1185	47"	1000

OPTIONS

- ▶ Reversible
- ▶ Freewheel



▶ Forward position



▶ Reverse position

