

Serrat



CHARACTERISTICS

- ► Steel-plate chassis, thickness 10 mm.
- ▶ Rotor with system RHENDUEL of Ø 550 mm.
- ▶ Power of tractor between 100 160 HP.
- ► 4 XPC side belt transmission.
- ► Treated blades.
- ► Feeder with system BRALAKC.
- ► High torque hydraulic motor reversible.
- Supports of bearing rotor in steel.

- High speed and high strength bearings.
- ▶ PTO 1,000 rpm.

with fixed palate.

RHENDUEL

citrus fruits, walnuts, hazels, etc.

For tractors between 100 and 160 HP.

their elimination, for later processes.

Mulcher with reversible hydraulic feeder, ideal for pruning of vineyard, dessert grapes, chestnut-trees, olive trees, almond-trees,


Machine for demanding works, with need to deposit very thin remains in the area, avoiding possible plagues and helping to

It has a rotor of crenellated cleavers, crossing

- Double bearing on rear roller.
- ► Triple feed chain.
- Double lines of counter hammers RHENDUEL.
- Model built under EC Normative.

Vision sol

Safety indicators visible to personnel.

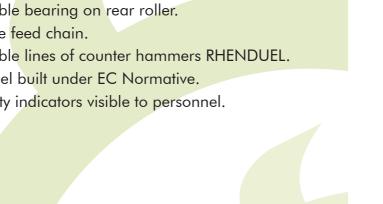

KASTOR 550

BRALAKC

SEKURLAST

Feeder BRALAKC



MODEL				RHENDUEL	KG № BELTS TYPE	Real Provide And P							
		mm	KW-HP				A mm	A in	B mm	B in	C mm	C in	
	T-1600	1600	74 - 100 119 - 160	6 x 8	1720	4 XPC	1865	73"	1845	73"	1000	39"	1000
	T-1800	1800	81 - 110 119 - 160	6 x 9	1858	4 XPC	2065	81"	1845	73"	1000	39"	1000
	T-2000	2000	88 - 120 119 - 160	6 x 10	1993	4 XPC	2265	90"	1845	73"	1000	39"	1000
	T-2300	2300	96 - 130 119 - 160	6 x 11	2193	4 XPC	2565	101"	1845	73"	1000	39"	1000

OPTIONS


Freewheel



22310 Castejón del Puente (Huesca)-España Tfno. (+34) 974 417 830 www.serrat.com - comercial@serrat.es



Triple feed chain





The data presented in this catalog are provided fo information purposes only and are not binding.