

TILLER 3




Soil preparation machine up to a depth of 120-150 mm, for tractors with Vario between 80 - 120 HP. Transforms forest land, with stumps and rocks, in land for cultivation avoiding accidents in later processes.

CHARACTERISTICS

- ▶ Steel-plate chassis, thickness 8 mm.
- ▶ Rotor FIXE TOP of Ø 470 mm.
- ▶ Gearbox SERRAT for 120 HP.
- ▶ 4 XPC belt transmission.
- ▶ Supports of bearing rotor in steel.
- ▶ Oscillating bearings of double row of rollers.
- ▶ PTO 540 rpm.
- ▶ Rear hydraulic hood.
- ▶ Protection chains.
- ▶ Chassis internal reinforcements, thickness 10 mm.
- ▶ System antiwire in rotor.
- ▶ Compact drive cover.
- ▶ Rear roller into the hood.
- ▶ Model built under EC Normative.
- ▶ Safety indicators visible to personnel.



1. Rear hydraulic hood
 2. Compact drive cover
 3. Rear roller into the hood
- FIXE TOP System

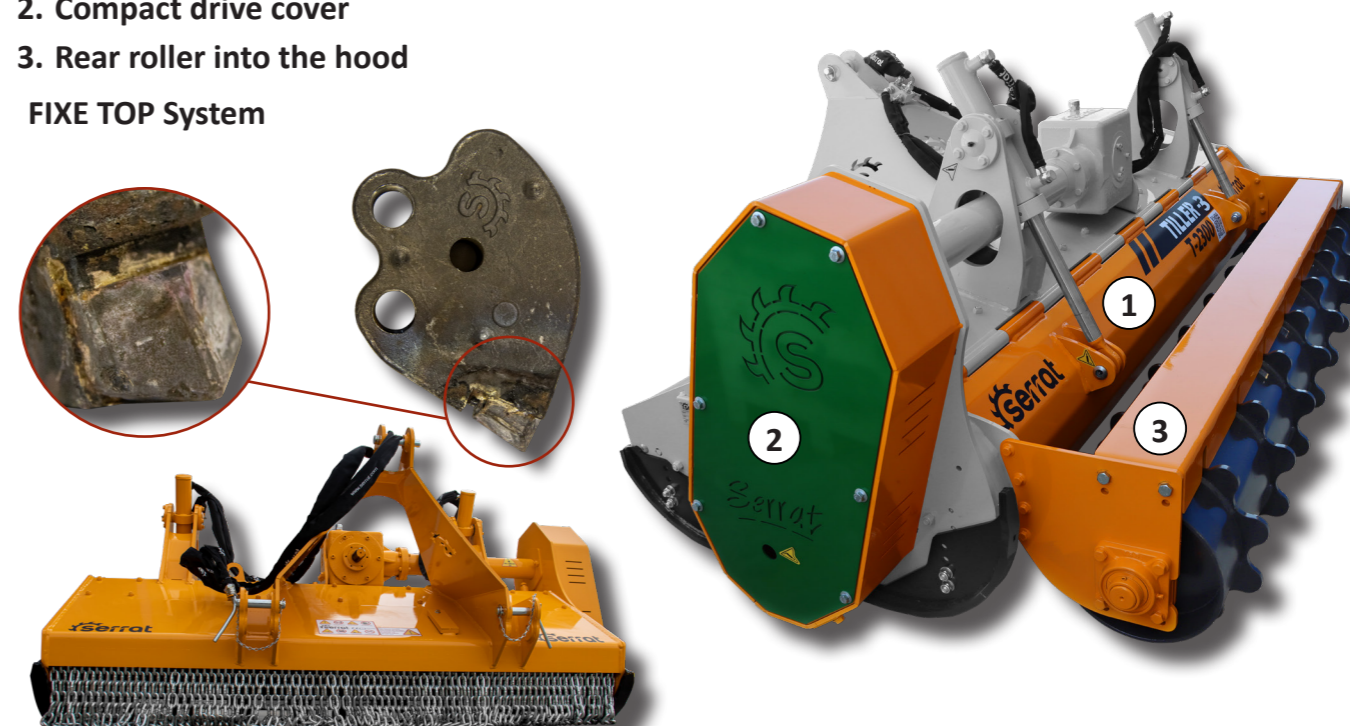

*For working in depth it is recommended that the tractor has a Creeper or Vario.

MODEL	mm	KW-HP	KG	Nº BELTS TYPE	Dimensions (mm/in)							
					A	A	B	B	C	C		
					mm	in	mm	in	mm	in		
T-1200	1200	59 - 80 75 - 100	26	935	4 XPC	1420	56"	1415	60"	950	66"	540
T-1400	1400	59 - 80 75 - 100	32	1070	4 XPC	1620	64"	1415	60"	950	66"	540
T-1600	1600	59 - 80 75 - 100	34	1160	4 XPC	1820	72"	1415	60"	950	66"	540
T-1800	1800	59 - 80 88 - 120	38	1230	4 XPC	2020	80"	1415	60"	950	66"	540
T-2000	2000	59 - 80 88 - 120	44	1316	4 XPC	2220	87"	1415	60"	950	66"	540

OPTIONS

- ▶ Centralized greasing

