




Soil preparation machine up to a depth of 400-500 mm, for tractors between 200 - 350 HP. It mulchs the stumps of old plantations, leaving a soft ground for the next plantation.

CHARACTERISTICS


- ▶ Steel-plate chassis, thickness 12 mm.
- ▶ Gearbox SERRAT 350 HP.
- ▶ Double synchronous belt transmission.
- ▶ Supports of bearing rotor in steel.
- ▶ Oscillating bearings of double row of rollers.
- ▶ Interchangeable rotor shaft.
- ▶ Solid steel rotor with teeth fitted inside the rotor.
- ▶ Double ploughshare for opening the land.
- ▶ PTO 1,000 rpm.
- ▶ Front skid shoes.
- ▶ Rear hydraulic hood.
- ▶ Interchangeable 8 mm welded plates Hardox internal reinforcement.
- ▶ System antiwire in rotor.
- ▶ Compact drive cover.
- ▶ Model built under EC Normative.
- ▶ Safety indicators visible to personnel.



1. Rear hydraulic hood
2. Compact drive cover

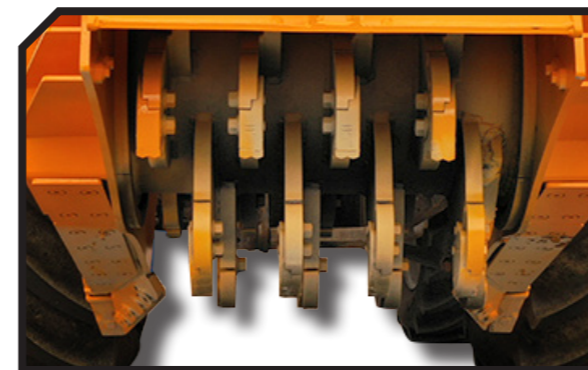

3. Teeth fitted inside the rotor

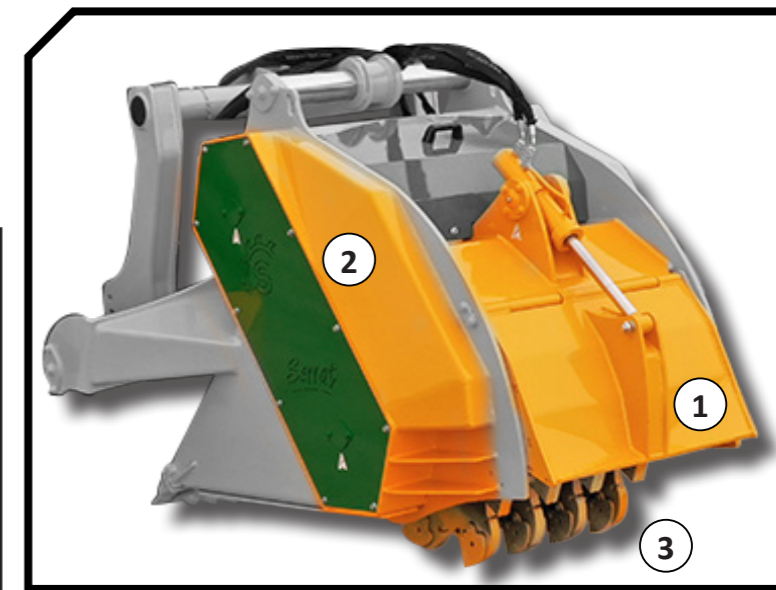

MODEL	mm	KW-HP	kg	Nº BELTS TYPE	Dimensions							
					A mm	A in	B mm	B in	C mm	C in		
T-1100	1100	149 - 200 257 - 350	48	3600	2 Synchronous	1100	43"	1954	77"	1500	59"	1000

OPTIONS

- ▶ Centralized greasing

