



The cabezal MF-2 is a standard flow mulching attachment suitable to compact track loader of more than 5 t, stock with the hydraulic auxiliary existing circuit.


Suitable for the maintenance of small greenspaces, riverbanks, canes and bushes up to 60 mm of diameter.

### CHARACTERISTICS

- ▶ Non-wear steel-plate chassis, thickness 6 mm.
- ▶ Rotor POLSER of Ø 420 mm.
- ▶ Mulcher for head compact track loader having a weight until 5 T.
- ▶ 3 XPB side belt transmission.
- ▶ Safety chains.
- ▶ High speed and high strength bearings.
- ▶ Hydraulic gear motor.
- ▶ Valve of recirculation incorporated into the motor.
- ▶ Front skid shoes.
- ▶ Model built under EC Normative.
- ▶ Safety indicators visible to personnel.



### Hydraulic gear motor

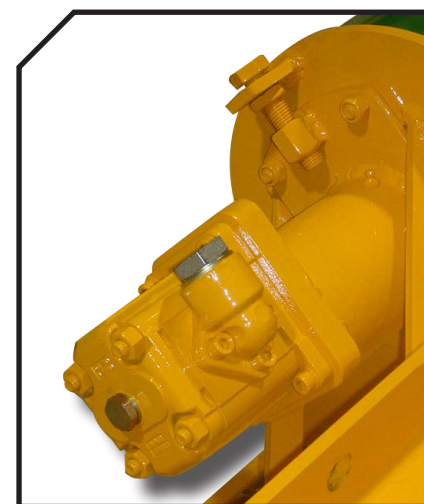

- (1) Rotor with grass flails or forged hammers
- (2) Safety chains

- (1)
- (2)




MODEL	mm	HORSE POWER		40	12	560	3 XPB	Nº BELTS TYPE					RPM Rotor max.	
		min. req.	max. aut.					A mm	A in	B mm	B in	C mm		C in
T-1400	1400	70-80 l/min	180 bar	40	12	560	3 XPB	1610	63"	940	37"	726	29"	2500
T-1600	1600	70-80 l/min	180 bar	48	16	600	3 XPB	1810	71"	940	37"	726	29"	2500
T-1800	1800	70-80 l/min	180 bar	48	16	638	3 XPB	2010	79"	940	37"	726	29"	2500

### OPTIONS



- ▶ Hydraulic hood

- ▶ Hydraulic engine with pistons
- ▶ Hooking

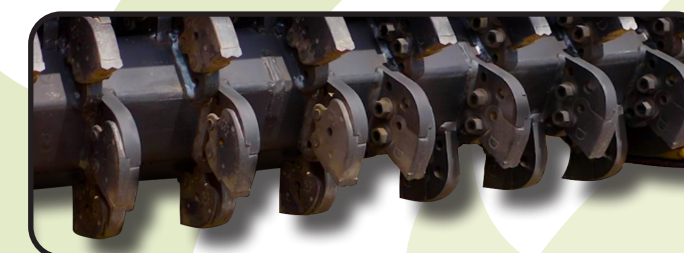

- ▶ Fixed tooth with tip in tungsten

