





Mulcher designed for tractors between 20 HP to 40 HP for the maintenance of vegetable mantle and for the elimination of remains of pruning up to 30 mm.



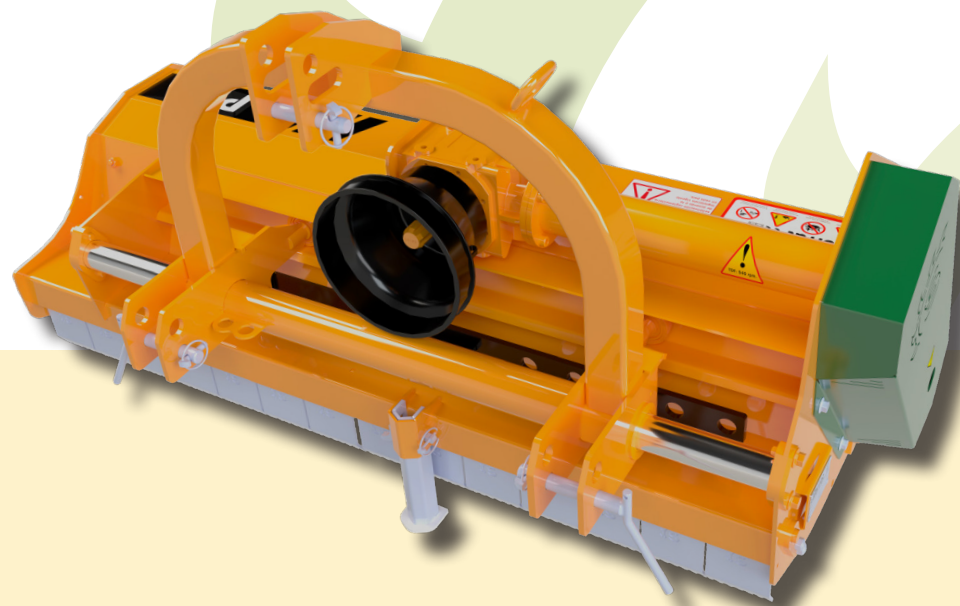



CHARACTERISTICS

- ▶ Steel-plate chassis, thickness 4 mm.
- ▶ Tubular rotor of Ø 350 mm.
- ▶ Gearbox with freewheel included.
- ▶ 3 XPB side belt transmission.
- ▶ Forged hammers SERRAT.
- ▶ 2 lines of counter knives screwed.
- ▶ GIROSTOP system into the bolt of the hammer.
- ▶ Supports of bearing rotor in steel.
- ▶ High speed and high strength bearings.
- ▶ Manual sliding hitch.
- ▶ PTO 540 rpm.
- ▶ Double bearing on rear roller.
- ▶ Rear height-adjustable roller Ø 140 mm.
- ▶ Model built under EC Normative.
- ▶ Safety indicators visible to personnel.

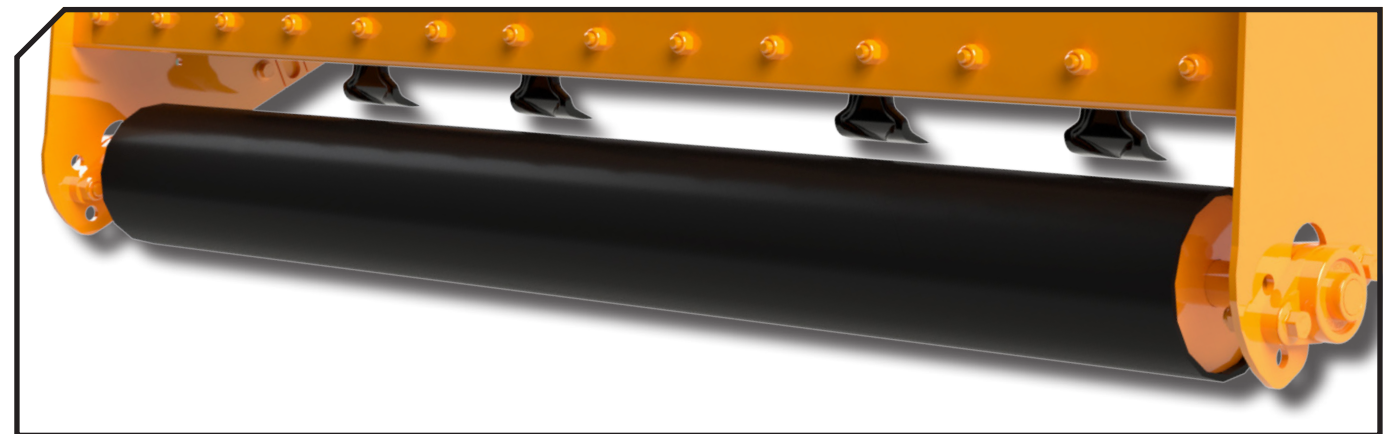

Detail of the roller




MODEL					Nº BELTS TYPE				
						A	B	C	
	mm	KW-HP		KG		mm-in	mm-in	mm-in	
T-1200	1200	15 - 20 30 - 40	16	260	3 XPB	1345-53"	885-35"	865-34"	540
T-1400	1400	18 - 25 30 - 40	16	275	3 XPB	1545-61"	885-35"	865-34"	540
T-1600	1600	26 - 35 30 - 40	20	285	3 XPB	1745-69"	885-35"	865-34"	540


OPTIONS



▶ Hydraulic sliding hitch

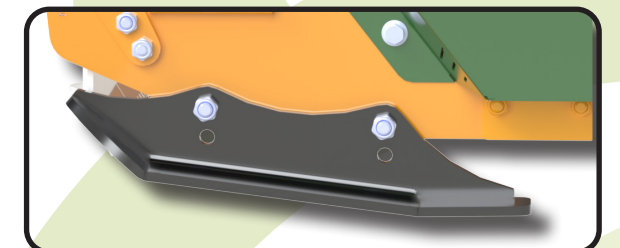


▶ Front adjustable skid shoes

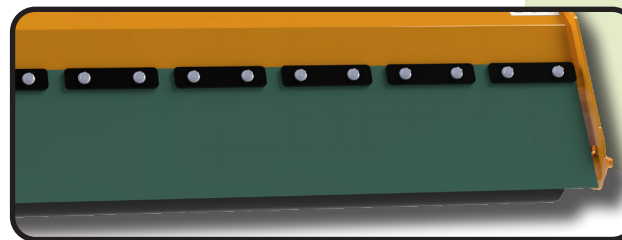

▶ Rear gum



Carretera nacional 240 km. 149,3
22310 Castejón del Puente (Huesca)-España
Tel. (+34) 974 417 830
www.serrat.com - comercial@serrat.com



The data presented in this catalog are provided for information purposes only and are not binding.