




The WOLKAVIA born before the need to realize a work of more quantity and quality, for the preparation of the area before the direct sowing, as well as for the regeneration of grassland.

The rotor POLSER of 650 mm of diameter provides a great aspiration to the soil, likewise, thanks to his large diameter, it retains the remains more time in its interior and mulch them 3 times more than a conventional machine.



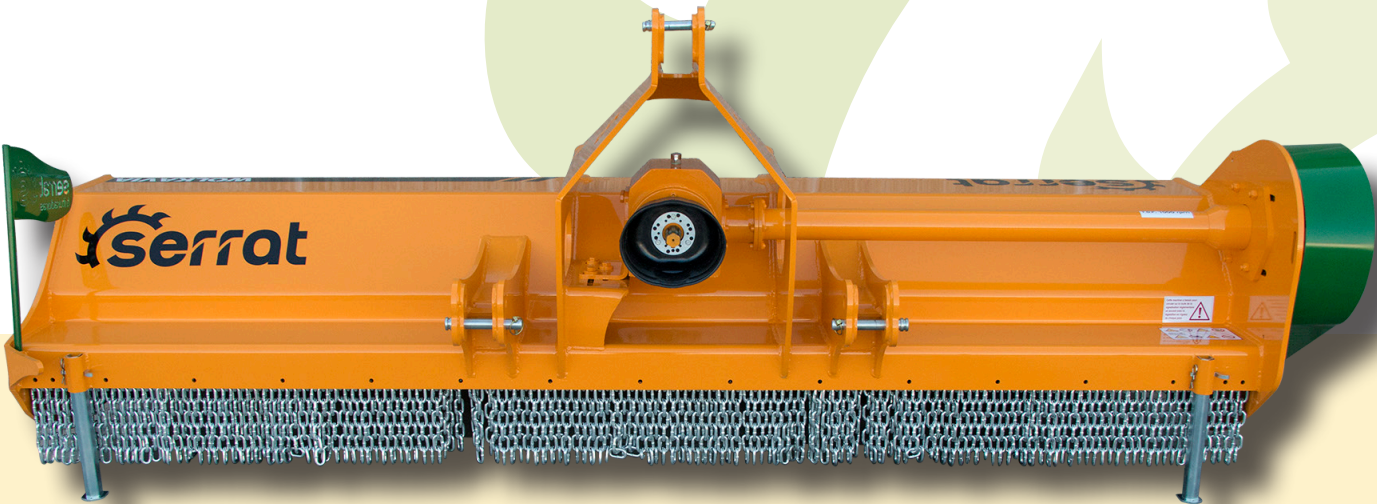



CHARACTERISTICS

- ▶ Steel-plate chassis, thickness 12 mm.
- ▶ Rotor POLSER of Ø 650 mm.
- ▶ Gearbox SERRAT 280 HP.
- ▶ 5 XPC side belt transmission.
- ▶ Forged agricultural hammers SERRAT.
- ▶ GIROSTOP system into the bolt of the hammer.
- ▶ Supports of bearing rotor in steel.
- ▶ High speed and high strength bearings.
- ▶ Front protection curtain.
- ▶ System antiwire in rotor.
- ▶ Double bearing on rear roller.
- ▶ Rear height-adjustable roller; Ø 323 mm.
- ▶ PTO 1,000 rpm.
- ▶ 3 lines of counter hammers.
- ▶ Model built under EC Normative.
- ▶ Safety indicators visible to personnel.



System antiwire in rotor



MODEL					Nº BELTS TYPE				
						A	B	C	
	mm	KW-HP		KG		mm-in	mm-in	mm-in	
T-2800	2800	89 - 120 149 - 200	28	1680	5 XPC	3071-121"	1570-62"	1300-51"	1000
T-3200	3200	89 - 120 149 - 200	32	1744	5 XPC	3471-137"	1570-62"	1300-51"	1000
T-3500	3500	93 - 125 150 - 240	32	1837	5 XPC	3771-148"	1570-62"	1300-51"	1000
T-3800	3800	97 - 130 179 - 280	32	1929	5 XPC	4071-160"	1570-62"	1300-51"	1000
T-4000	4000	149 - 200 179 - 280	40	2130	5 XPC	4271-168"	1570-62"	1300-51"	1000

OPTIONS

- ▶ Hydraulic side shift
- ▶ Double geardrives
- ▶ Freewheel




Front chains



Rear gum



Carretera nacional 240 km. 149,3
22310 Castejón del Puente (Huesca)-España
Tel. (+34) 974 417 830
www.serrat.com - comercial@serrat.com



The data presented in this catalog are provided for information purposes only and are not binding.