

Mulcher combined of great power for tractors up to 270 HP. Perfect for punctured of maize, sorghum, sunflower, cotton and meadow in big extensions.

It incorporates hydraulic rear hood with turn arble nozzles, to extend the matter uniformly.

Double geardrives of traction, which guarantees a perfect transmission of power between the tractor and the rotor. Rotor POLSER of 750 mm of diameter equipped with hammers.



## CHARACTERISTICS


- ▶ Steel-plate chassis, thickness 12 mm.
- ▶ Rotor POLSER of Ø 750 mm.
- ▶ Gearbox with freewheel up to 270 HP.
- ▶ 2 x 4 XPC side belt transmission.
- ▶ Stamped hammers.
- ▶ GIROSTOP system into the bolt of the hammer.
- ▶ Supports of bearing rotor in steel.
- ▶ High speed and high strength bearings.
- ▶ Front protection curtain.
- ▶ System antiwire in rotor.
- ▶ Double bearing on rear roller.
- ▶ Rear roller Ø 280 mm.
- ▶ PTO 1,000 rpm.
- ▶ Rear hydraulic hood.
- ▶ Model built under EC Normative.
- ▶ Safety indicators visible to personnel.



Rear hydraulic hood



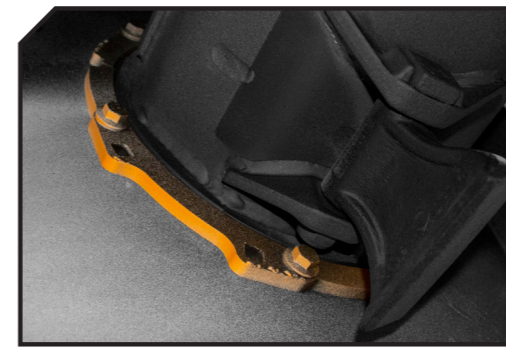




System antiwire in rotor



Rear roller Ø 280 mm




## MODEL

MODEL	 mm	 KW-HP	 KG	N° BELTS TYPE					
					A mm-in	B mm-in	C mm-in		
T-2800	2800	89 - 120 147 - 200	24	2380	2 x 4 XPC	3153-124"	2280-90"	1260-50"	1000
T-3200	3200	104 - 140 147 - 200	32	2605	2 x 4 XPC	3553-140"	2280-90"	1260-50"	1000
T-3800	3800	119 - 160 147 - 200	32	2845	2 x 4 XPC	4153-163"	2280-90"	1260-50"	1000
T-4000	4000	134 - 180 198 - 270	32	3010	2 x 4 XPC	4353-171"	2280-90"	1260-50"	1000

## OPTIONS



▶ Adjustable nozzle

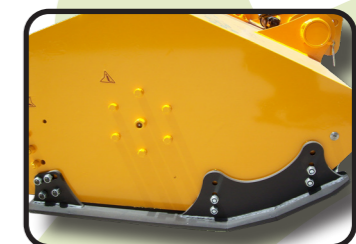

▶ Front adjustable skid shoes



▶ Front chains



▶ Adjustable wheels

