



# SPLINTER 350



Mulcher with reversible hydraulic feeder, ideal for pruning of olive trees, citrus trees and nuts.

Adapted to crush residues from 60 mm of diameter, with the rotor SPLINTER of SERRAT which is adapted for tractors between 60 and 120 HP.


It works in reverse to preserve the tractor for doesn't pass at the top of the branches.

## CHARACTERISTICS


- ▶ Steel-plate chassis, thickness 8 mm.
- ▶ Rotor with SPLINTER technology of Ø 350 mm.
- ▶ Gearbox SERRAT for tractors between 60 and 120 HP.
- ▶ 3 XPC side belt transmission.
- ▶ Treated blades.
- ▶ Feeder with system BRALAKC.
- ▶ High torque hydraulic motor reversible.
- ▶ Supports of bearing rotor in steel.
- ▶ High speed and high strength bearings.
- ▶ PTO 540 rpm (110 HP).
- ▶ Triple feed chain.
- ▶ 2 lines of counter blades screwed.
- ▶ Ground-control rear fixed wheels.
- ▶ Model built under EC Normative.
- ▶ Safety indicators visible to personnel.



2 lines of counter knives screwed

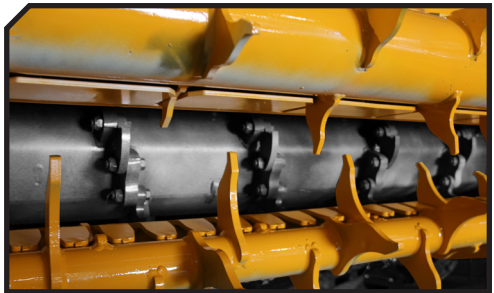

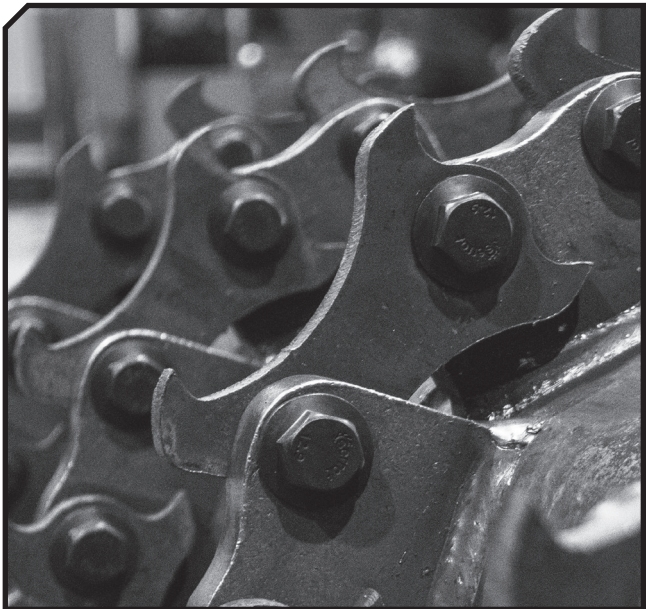






Rotor with SPLINTER technology




Rear wheels



MODEL									
	mm	KW-HP		KG	Nº BELTS TYPE	A mm-in	B mm-in	C mm-in	
T-1300	1300	45 - 60 88 - 120	36	865	3 XPC	1740-69"	1415-56"	1080-43"	540
T-1500	1500	52 - 70 88 - 120	44	950	3 XPC	1940-76"	1415-56"	1080-43"	540
T-1600	1600	56 - 75 88 - 120	46	995	3 XPC	2040-80"	1415-56"	1080-43"	540
T-1800	1800	67 - 90 88 - 120	52	1050	3 XPC	2240-88"	1415-56"	1080-43"	540
T-2000	2000	75 - 100 88 - 120	58	1100	3 XPC	2440-96"	1415-56"	1080-43"	540


## OPTIONS

Freewheel



Hidrahelp

Pick-up tines

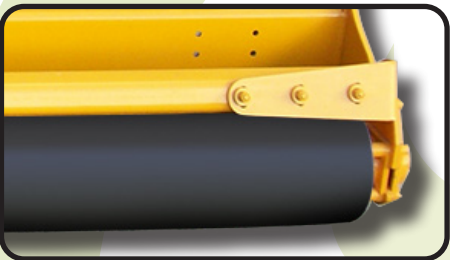


Rear roller

Reversible



Carretera nacional 240 km. 149,3  
22310 Castejón del Puente (Huesca)-España  
Tel. (+34) 974 417 830  
www.serrat.com - comercial@serrat.com



The data presented in this catalog are provided for information purposes only and are not binding.