



SPLINTER 450




Mulcher with reversible hydraulic feeder, ideal for pruning of olive trees, citrus trees and nuts.

Adapted to crush residues from 80 mm of diameter, with the rotor SPLINTER of SERRAT which is adapted for tractors between 70 and 140 HP.


It works in reverse to preserve the tractor for doesn't pass at the top of the branches.

CHARACTERISTICS


- ▶ Steel-plate chassis, thickness 10 mm.
- ▶ Rotor with SPLINTER technology of Ø 450 mm.
- ▶ Gearbox SERRAT for tractors between 70 and 140 HP.
- ▶ 3 XPC side belt transmission.
- ▶ Treated blades.
- ▶ Feeder with system BRALAKC.
- ▶ High torque hydraulic motor reversible.
- ▶ Supports of bearing rotor in steel.
- ▶ High speed and high strength bearings.
- ▶ PTO 540 rpm (110 HP) or 1,000 rpm (140 HP).
- ▶ Triple feed chain.
- ▶ 2 lines of counter blades screwed.
- ▶ Ground-control rear fixed wheels.
- ▶ Model built under EC Normative.
- ▶ Safety indicators visible to personnel.

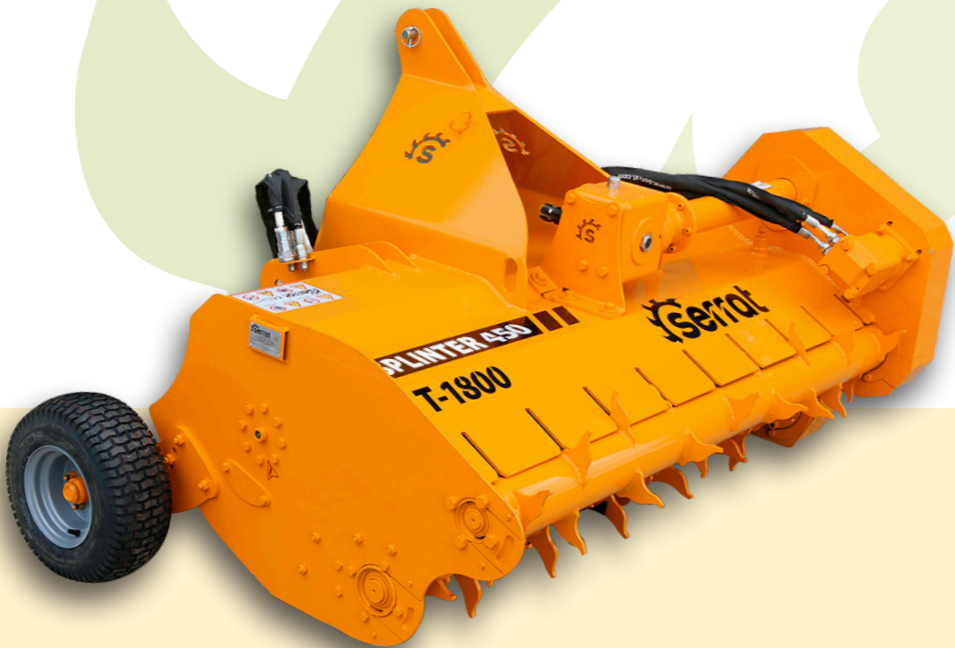

2 lines of counter knives screwed

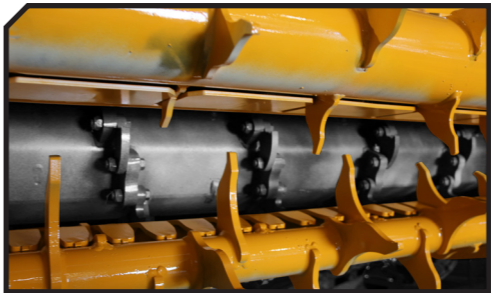



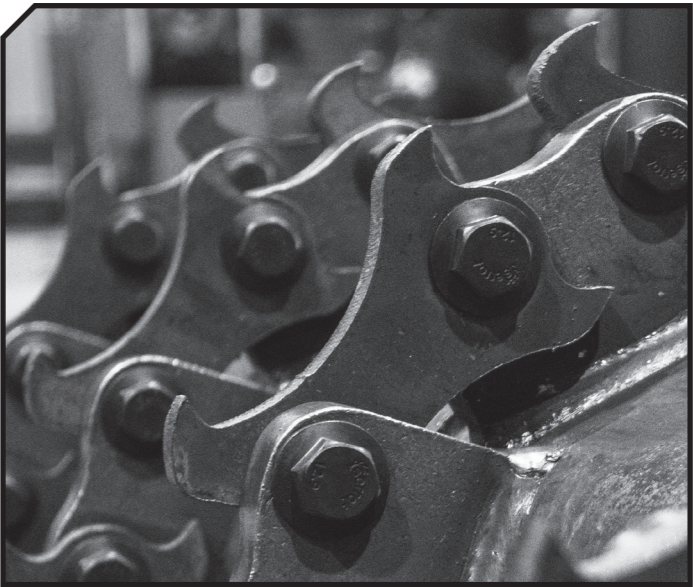



Rotor with SPLINTER technology



Rear wheels




MODEL	 mm	 KW-HP		 KG	Nº BELTS TYPE				
						A mm-in	B mm-in	C mm-in	
T-1600	1600	52 - 70 110 - 140	38	1108	3 XPC	1755-69"	1235-49"	1215-48"	540
T-1800	1800	60 - 80 110 - 140	42	1200	3 XPC	1955-77"	1235-49"	1215-48"	1000
T-2000	2000	67 - 90 110 - 140	48	1286	3 XPC	2155-85"	1235-49"	1215-48"	1000



PTO 540 rpm -> 110 HP; PTO 1.000 rpm ->140 HP

OPTIONS

Freewheel



Hidrahelp

Pick-up tines



Rear roller

Reversible



Carretera nacional 240 km. 149,3
22310 Castejón del Puente (Huesca)-España
Tel. (+34) 974 417 830
www.serrat.com - comercial@serrat.com



The data presented in this catalog are provided for information purposes only and are not binding.