



SPLINTER 550




Mulcher with reversible hydraulic feeder, ideal for pruning of olive trees, citrus trees and nuts.

Adapted to crush residues from 100 mm of diameter, with the rotor SPLINTER of SERRAT which is adapted for tractors between 90 and 160 HP.


It works in reverse to preserve the tractor for doesn't pass at the top of the branches.

CHARACTERISTICS


- ▶ Steel-plate chassis, thickness 8 mm.
- ▶ Rotor with SPLINTER technology of Ø 550 mm.
- ▶ Gearbox SERRAT for tractors between 90 and 160 HP.
- ▶ 4 XPC side belt transmission.
- ▶ Treated blades.
- ▶ Feeder with system BRALAKC.
- ▶ High torque hydraulic motor reversible.
- ▶ Supports of bearing rotor in steel.
- ▶ High speed and high strength bearings.
- ▶ PTO 1,000 rpm (160 HP).
- ▶ Double bearing on rear roller.
- ▶ Triple feed chain.
- ▶ 3 lines of counter blades screwed.
- ▶ Ground-control rear fixed wheels.
- ▶ Model built under EC Normative.
- ▶ Safety indicators visible to personnel.

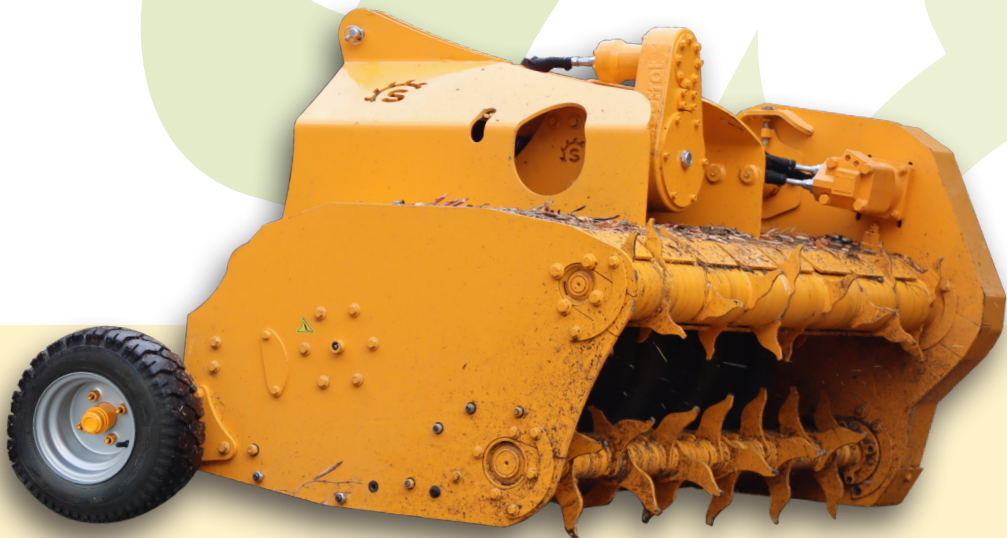

3 lines of counter knives screwed

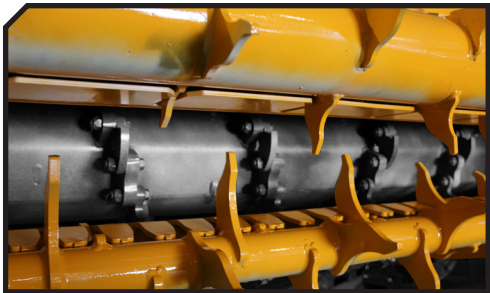



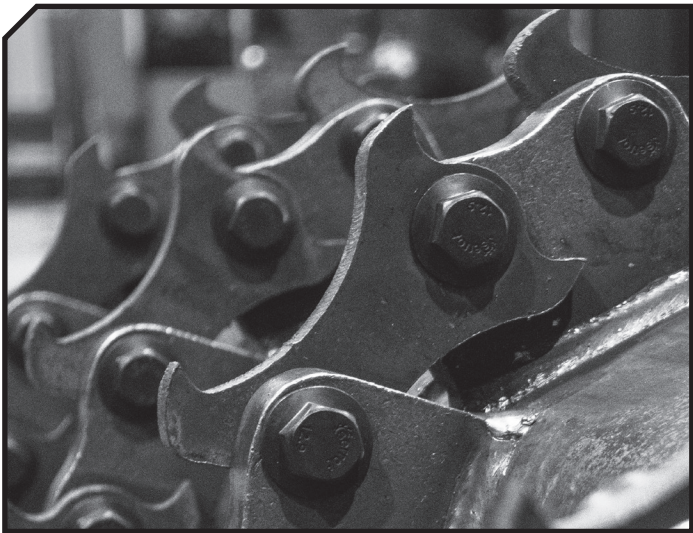



Rotor with SPLINTER technology




Rear wheels



MODEL	 mm	 KW-HP		 KG	Nº BELTS TYPE				
						A mm-in	B mm-in	C mm-in	
T-1800	1800	67 - 90 119 - 160	42	1570	4 XPC	2240-88"	1560-61"	1290-51"	1000
T-2000	2000	74 - 100 119 - 160	48	1800	4 XPC	2440-96"	1560-61"	1290-51"	1000
T-2300	2300	82 - 110 119 - 160	54	2000	4 XPC	2740-108"	1560-61"	1290-51"	1000

OPTIONS

Freewheel



Hidrahelp


Pick-up tines



Rear roller



Carretera nacional 240 km. 149,3  
22310 Castejón del Puente (Huesca)-España  
Tel. (+34) 974 417 830  
www.serrat.com - comercial@serrat.com



The data presented in this catalog are provided for information purposes only and are not binding.