



Forestry mulcher for standard tractors or crawler tractor between 50 and 110 HP.

Suitable for the cleaning of brushwood, which favors the growth of trees, the reclamation of land, the maintenance and restoration of banks, the maintenance of areas under power lines, forestry roads, fire-blocking lines.

It incorporates rotor POLSER + of 470 mm of diameter.

## CHARACTERISTICS

- ▶ Steel-plate chassis, thickness 8 mm.
- ▶ Rotor POLSER + of Ø 470 mm.
- ▶ Gearbox SERRAT.
- ▶ 3/4 XPC side belt transmission.
- ▶ Swinging 360° forged forestry hammers SERRAT or fixed tooth with tip in tungsten or blades DRR.
- ▶ Supports of bearing rotor in steel.
- ▶ Oscillating bearings of double row of rollers.
- ▶ Front protection curtain.
- ▶ PTO 540 rpm.
- ▶ System antiwire in rotor.
- ▶ Steel counter hammers.
- ▶ Skid shoes.
- ▶ Rear hydraulic hood.
- ▶ Model built under EC Normative.
- ▶ Safety indicators visible to personnel.






1. Swinging hammers
2. Rear hydraulic hood

Blades DRR




FIXE TOP System

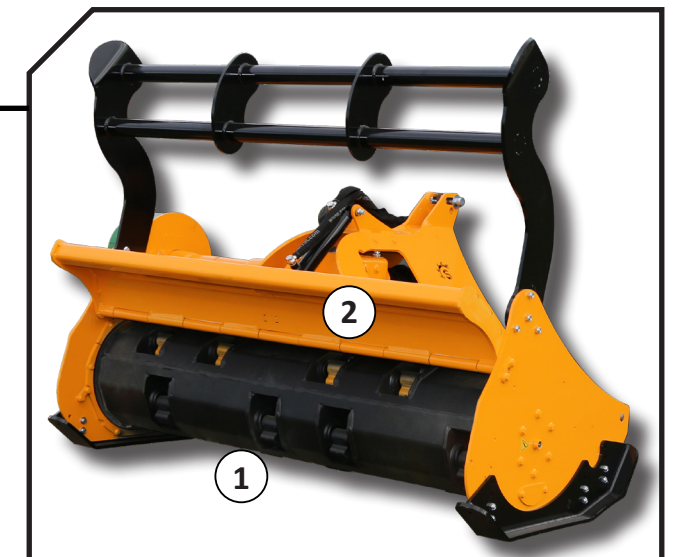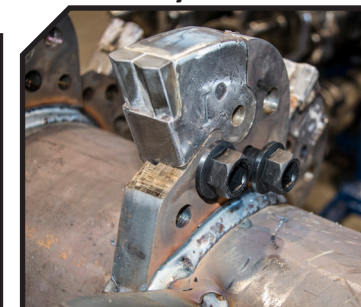


| MODEL  |  |  |  |  |  |  | Nº BELTS TYPE |  |          |         |  |
|--------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------|-------------------------------------------------------------------------------------|----------|---------|-------------------------------------------------------------------------------------|
|        |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |               | A                                                                                   | B        | C       |                                                                                     |
|        | mm                                                                                  | KW-HP                                                                               |                                                                                     |                                                                                     |                                                                                     | KG                                                                                  |               | mm-in                                                                               | mm-in    | mm-in   |                                                                                     |
| T-1400 | 1400                                                                                | 37 - 50<br>82 - 110                                                                 | 12                                                                                  | 36                                                                                  | 19                                                                                  | 789                                                                                 | 3 XPC         | 1640-65"                                                                            | 1070-42" | 970-38" | 540                                                                                 |
| T-1600 | 1600                                                                                | 44 - 60<br>82 - 110                                                                 | 16                                                                                  | 44                                                                                  | 22                                                                                  | 862                                                                                 | 3 XPC         | 1840-72"                                                                            | 1070-42" | 970-38" | 540                                                                                 |
| T-1800 | 1800                                                                                | 52 - 70<br>82 - 110                                                                 | 16                                                                                  | 46                                                                                  | 24                                                                                  | 924                                                                                 | 3 XPC         | 2040-80"                                                                            | 1070-42" | 970-38" | 540                                                                                 |
| T-2000 | 2000                                                                                | 60 - 80<br>82 - 110                                                                 | 20                                                                                  | 50                                                                                  | 26                                                                                  | 966                                                                                 | 4 XPC         | 2240-88"                                                                            | 1070-42" | 970-38" | 540                                                                                 |

## OPTIONS

- ▶ Freewheel
- ▶ Compact drive cover
- ▶ 1,000 rpm PTO

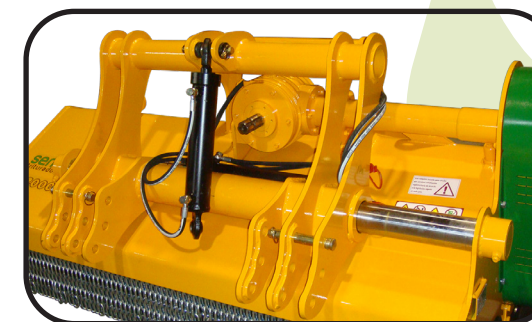

▶ Hydraulic side shift

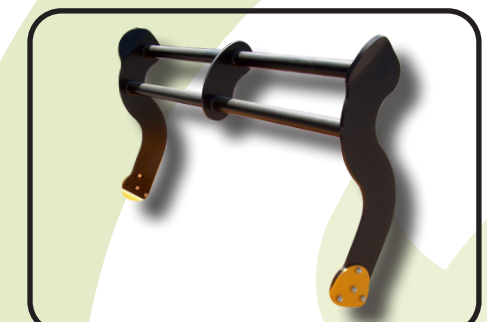

▶ Pushing frame

