



Heavy duty forestry mulcher for tractors between 80 and 150 HP. Suitable for the cleaning of brushwood, which favors the growth of trees, the reclamation of land, the maintenance and restoration of banks, the maintenance of areas under power lines, forestry roads, fire blocking lines, etc.
 Rotor of forest conception with swinging hammers of trapezoidal shape or fixed tooth carbide. The gearbox is put off with regard to the rotor to reduce the angulation of the transmission. It incorporates rotor POLSER + of 550 mm of diameter. Hooking: fixed and movable.


CHARACTERISTICS

- ▶ Steel-plate chassis, thickness 10 mm.
- ▶ Rotor POLSER + of Ø 550 mm.
- ▶ Gearbox SERRAT for 150 HP.
- ▶ 3/4 XPC side belt transmission.
- ▶ Swinging 360° forged forestry hammers SERRAT or fixed tooth with tip in tungsten or blades DRR.
- ▶ Supports of bearing rotor in steel.
- ▶ Oscillating bearings of double row of rollers.
- ▶ Front protection curtain.
- ▶ PTO 540 rpm (1,000 rpm from T-1800).
- ▶ System antiwire in rotor.
- ▶ Steel counter hammers.
- ▶ Skid shoes.
- ▶ Third hydraulic point.
- ▶ Model built under EC Normative.
- ▶ Safety indicators visible to personnel.





1. Swinging hammers
2. Third hydraulic point

Blades DRR



FIXE TOP System

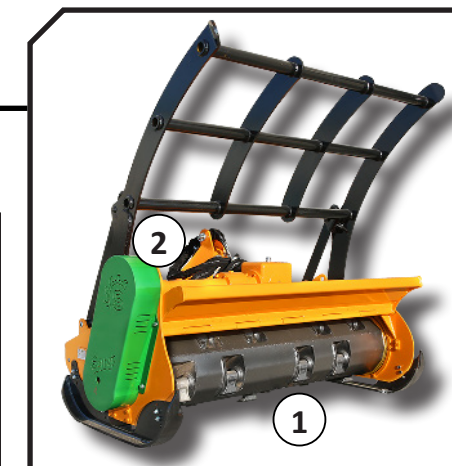


MODEL									
	mm	KW-HP				KG	Nº BELTS TYPE	A mm-in B mm-in C mm-in	
T-1400	1400	60 - 80 112 - 150	12	36	19	1040	3 XPC	1680-66" 1340-53" 1010-40"	540
T-1600	1600	67 - 90 112 - 150	12	40	22	1160	3 XPC	1880-74" 1340-53" 1010-40"	540
T-1800	1800	74 - 100 112 - 150	16	45	24	1253	4 XPC	2080-82" 1340-53" 1010-40"	1000
T-2000	2000	82 - 110 112 - 150	16	50	26	1325	4 XPC	2280-90" 1340-53" 1010-40"	1000
T-2300	2300	96 - 130 112 - 150	20	58	29	1510	4 XPC	2580-102" 1340-53" 1010-40"	1000

OPTIONS


- ▶ Reinforced rotor
- ▶ Freewheel
- ▶ Compact drive cover
- ▶ Preparation for front lift (gearbox)



▶ Hidrahelp

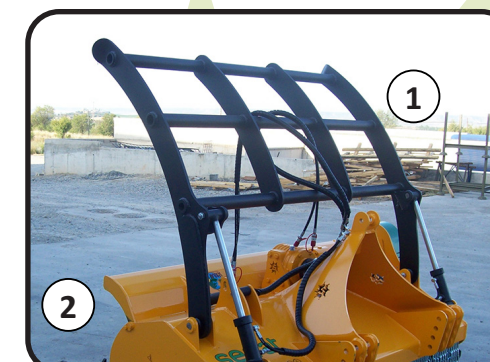

1. ▶ Pushing frame
2. ▶ Rear hydraulic hood

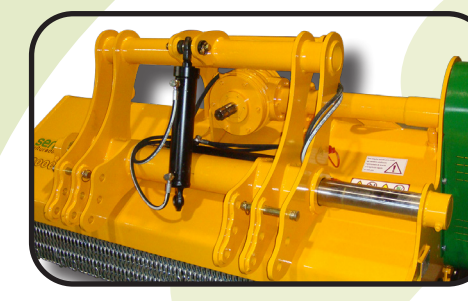

▶ Hydraulic side shift

