




Heavy duty forestry mulcher for tractors between 150 and 230 HP. Suitable for the cleaning of brushwood, which favors the growth of trees, the reclamation of land, the maintenance and restoration of banks, the maintenance of areas under power lines, forestry roads, fire blocking lines, etc. Rotor of forest conception with swinging hammers of trapezoidal shape or fixed tooth carbide. The gearbox is put off with regard to the rotor to reduce the angulation of the transmission. It incorporates rotor POLSER + of 550 mm of diameter. Hooking fixed.

## CHARACTERISTICS

- ▶ Steel-plate chassis, thickness 10 mm.
- ▶ Rotor POLSER + of Ø 550 mm.
- ▶ Gearbox with freewheel included.
- ▶ 2 x 3 XPC side belt transmission.
- ▶ Swinging 360° forged forestry hammers SERRAT or fixed tooth with tip in tungsten or blades DRR.
- ▶ Supports of bearing rotor in steel.
- ▶ Oscillating bearings of double row of rollers.
- ▶ Front protection curtain.
- ▶ PTO 1,000 rpm.
- ▶ Steel counter hammers.
- ▶ Skid shoes.
- ▶ Rear hydraulic hood.
- ▶ System antiwire in rotor.
- ▶ Compact drive cover.
- ▶ Hydraulic pushing frame.
- ▶ Reinforced teeth of the pushing frame.
- ▶ Model built under EC Normative.
- ▶ Safety indicators visible to personnel.



## FIXE TOP System

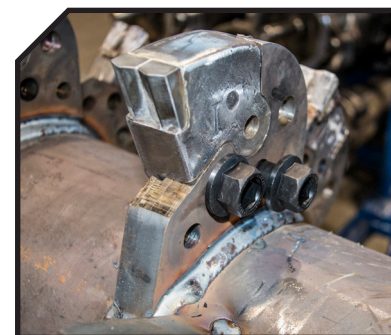


## Blades DRR









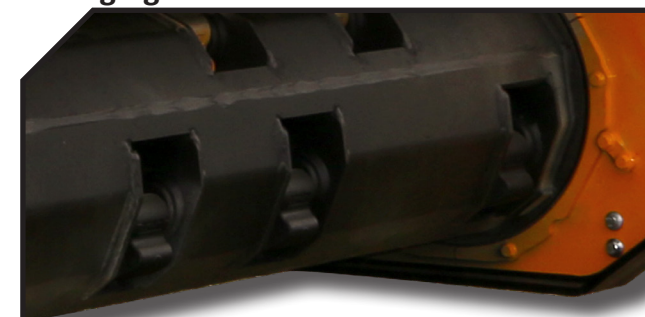




## Compact drive cover



## Swinging hammers




MODEL											
	mm	KW-HP				KG	Nº BELTS TYPE	A mm-in	B mm-in	C mm-in	
T-2000	2000	112 - 150 172 - 230	16	50	26	1990	2 x 3 XPC	2345-92"	1840-72"	1380-54"	1000
T-2300	2300	119 - 160 172 - 230	20	58	29	2200	2 x 3 XPC	2645-104"	1840-72"	1380-54"	1000
T-2500	2500	134 - 180 172 - 230	20	62	31	2290	2 x 3 XPC	2845-112"	1840-72"	1380-54"	1000

## OPTIONS



## ▶ Torque converter



## ▶ Hidrahel



## ▶ Centralized greasing

