




CHARACTERISTICS

- ▶ Steel-plate chassis, thickness 12 mm.
- ▶ Rotor POLSER + of Ø 725 mm.
- Gearbox with freewheel included.
- ► 2 x 5 XPC side belt transmission.
- ► Swinging 360° forged forestry hammers SERRAT or fixed tooth with tip in tungsten or blades DRR.
- Supports of bearing rotor in steel.
- Oscillating bearings of double row of rollers.
- ► Double front safety chains.
- ▶ PTO 1,000 rpm.



Heavy duty forestry mulcher for tractors between 200 and 350 HP.

Equipped with swinging hammers for the cleaning of brushwood, which favors the growth of trees, the reclamation of land, the maintenance and restoration of banks, the maintenance of areas under power lines, forestry roads, fire blocking lines. Equipped with rotor of fixed tooth with system FIXE TOP, for thick wood and stumps. This mulcher integrates all the necessary options for an optimal forest work.

- ► Steel counter hammers.
- Skid shoes.
- Rear hydraulic hood.
- Hydraulic pushing frame.
- System antiwire in rotor.
- Compact drive cover.
- Chassis internal reinforcements.
- Transmission by cardan to side belts.
- Pulleys of diameter 350 mm.
- Model built under EC Normative.
- Safety indicators visible to personnel.


1. Pushing frame 2. Rear hydraulic hood

Transmission by cardan to side belts **RAIL BOX System (optional) with** freewheel included System antiwire in rotor











Third hydraulic point




Torque converter

Hidrahelp






Forestr

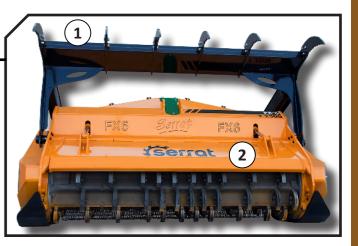

Swinging hammers



KG	N°BELTS TYPE				
		A mm-in	B mm-in	C mm-in	
4000	2 x 5 XPC	2500-98″	2090-82″	1930-76″	1000
4350	2 x 5 XPC	2800-110″	2090-82″	1930-76″	1000
4830	2 x 5 XPC	3000-118″	2090-82″	1930-76″	1000



Centralized greasing

he data presented in this catalog are provided for ion purposes only and are not bind

95