



Soil preparation machine up to a depth of 150 mm, for tractors with Vario between 60 - 80 HP. Transforms forest land, with stumps and rocks, in land for cultivation avoiding accidents in later processes.

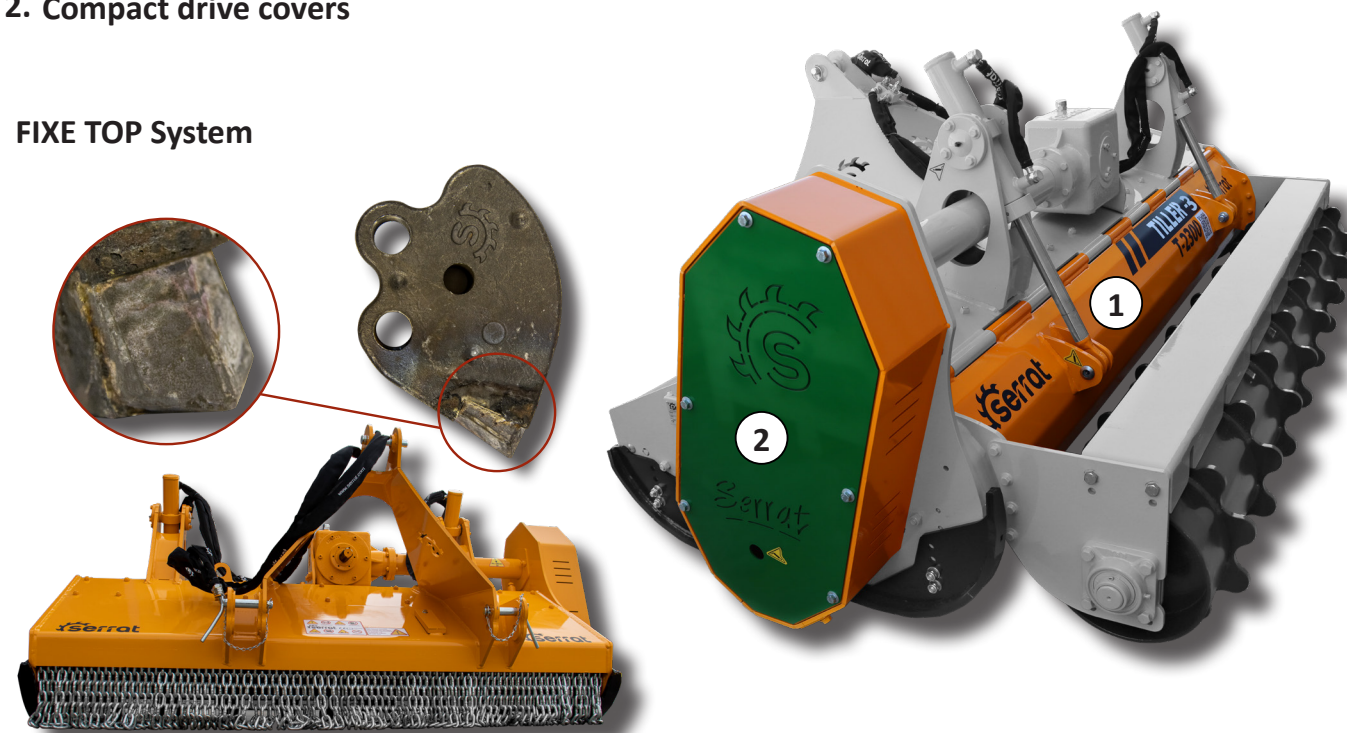
CHARACTERISTICS







- ▶ Steel-plate chassis, thickness 8 mm.
- ▶ Rotor FIXE TOP of Ø 470 mm.
- ▶ Gearbox SERRAT for 80 HP.
- ▶ 4 XPC belt transmission.
- ▶ Supports of bearing rotor in steel.
- ▶ Oscillating bearings of double row of rollers.
- ▶ PTO 540 rpm.
- ▶ Rear hydraulic hood.
- ▶ Protection chains.
- ▶ Chassis internal reinforcements, thickness 10 mm.
- ▶ System antiwire in rotor.
- ▶ Compact drive cover.
- ▶ Rear roller into the hood.
- ▶ Soil preparation machine up to a depth of 150 mm.
- ▶ Model built under EC Normative.
- ▶ Safety indicators visible to personnel.



1. Rear hydraulic hood
2. Compact drive covers

FIXE TOP System



MODEL					Nº BELTS TYPE				
						A	B	C	
	mm	KW-HP				mm-in	mm-in	mm-in	
T-1200	1200	45 - 60 59 - 80	26	935	4 XPC	1420-56"	1415-60"	950-66"	540
T-1400	1400	45 - 60 59 - 80	32	1070	4 XPC	1620-64"	1415-60"	950-66"	540
T-1600	1600	45 - 60 59 - 80	34	1160	4 XPC	1820-72"	1415-60"	950-66"	540

*For working in depth it is recommended that the tractor has a Creeper or Vario.

