



TILLER 5



FIXE TOP




Soil preparation machine up to a depth of 300 mm, for tractors between 130 - 180 HP. Transforms forest land, with stumps and rocks, in land for cultivation avoiding accidents in later processes.

CHARACTERISTICS


- ▶ Steel-plate chassis, thickness 10 mm.
- ▶ Rotor FIXE TOP of Ø 550 mm.
- ▶ Centralized greasing.
- ▶ Gearbox SERRAT for 180 HP.
- ▶ 2 x 5 XPC belt transmission.
- ▶ Supports of bearing rotor in steel.
- ▶ Oscillating bearings of double row of rollers.
- ▶ PTO 1,000 rpm.
- ▶ Rear hydraulic hood.
- ▶ Protection chains.
- ▶ Chassis internal reinforcements, thickness 10 mm.
- ▶ System antiwire in rotor.
- ▶ Compact drive cover.
- ▶ Hydraulic levelling roller.
- ▶ Soil preparation machine up to a depth of 300 mm.
- ▶ Model built under EC Normative.
- ▶ Safety indicators visible to personnel.




1. Rear hydraulic hood
2. Compact drive cover
3. Hydraulic levelling roller

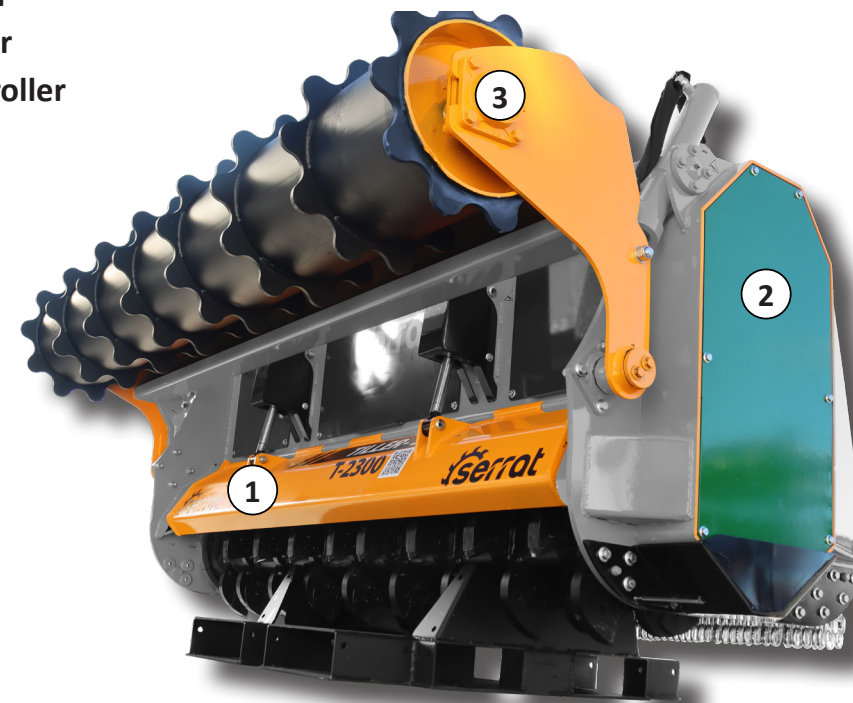

Centralized greasing

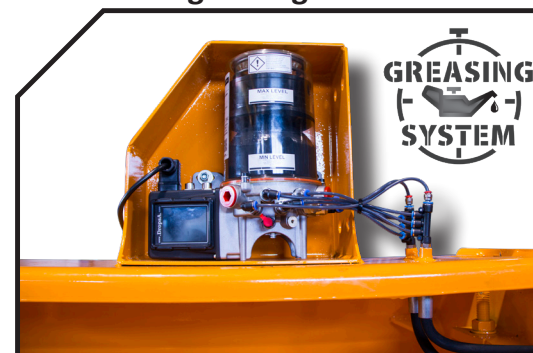

FIXE TOP System

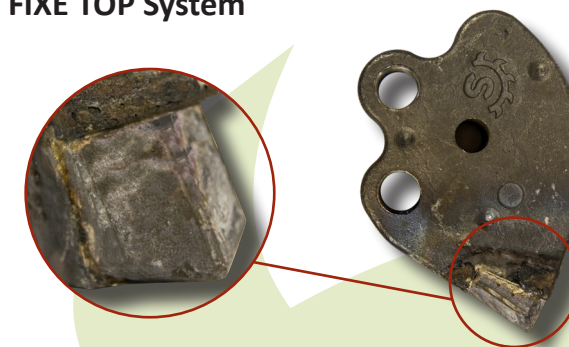

*For working in depth it is recommended that the tractor has a Creeper or Vario.

MODEL					Nº BELTS TYPE				
	mm	KW-HP				A mm-in	B mm-in	C mm-in	
T-1800	1800	97 - 130 134 - 180	44	2080	2 x 5 XPC	2210-87"	1840-72"	1380-54"	1000
T-2000	2000	97 - 130 134 - 180	44	2310	2 x 5 XPC	2410-95"	1840-72"	1380-54"	1000
T-2300	2300	97 - 130 134 - 180	50	2655	2 x 5 XPC	2710-107"	1840-72"	1380-54"	1000
T-2500	2500	97 - 130 134 - 180	56	2885	2 x 5 XPC	2910-115"	1840-72"	1380-54"	1000



Carretera nacional 240 km. 149,3
22310 Castejón del Puente (Huesca)-España
Tel. (+34) 974 417 830
www.serrat.com - comercial@serrat.com



The data presented in this catalog are provided for information purposes only and are not binding.