



TILLER 6



FIXE TOP




Soil preparation machine up to a depth of 350 mm, for tractors between 180 - 300 HP. Transforms forest land, with stumps and rocks, in land for cultivation avoiding accidents in later processes.

CHARACTERISTICS


- ▶ Steel-plate chassis, thickness 12 mm.
- ▶ Rotor FIXE TOP of Ø 625 mm.
- ▶ Centralized greasing.
- ▶ Gearbox SERRAT for 300 HP.
- ▶ Double synchronous belt transmission.
- ▶ Supports of bearing rotor in steel.
- ▶ Oscillating bearings of double row of rollers.
- ▶ PTO 1,000 rpm.
- ▶ Rear hydraulic hood.
- ▶ Front hydraulic hood anti projections.
- ▶ Chassis internal reinforcements, thickness 12 mm.
- ▶ System antiwire in rotor.
- ▶ Compact drive cover.
- ▶ Hydraulic levelling roller.
- ▶ Soil preparation machine up to a depth of 350 mm.
- ▶ Model built under EC Normative.
- ▶ Safety indicators visible to personnel.



1. Rear hydraulic hood
2. Compact drive cover
3. Hydraulic levelling roller

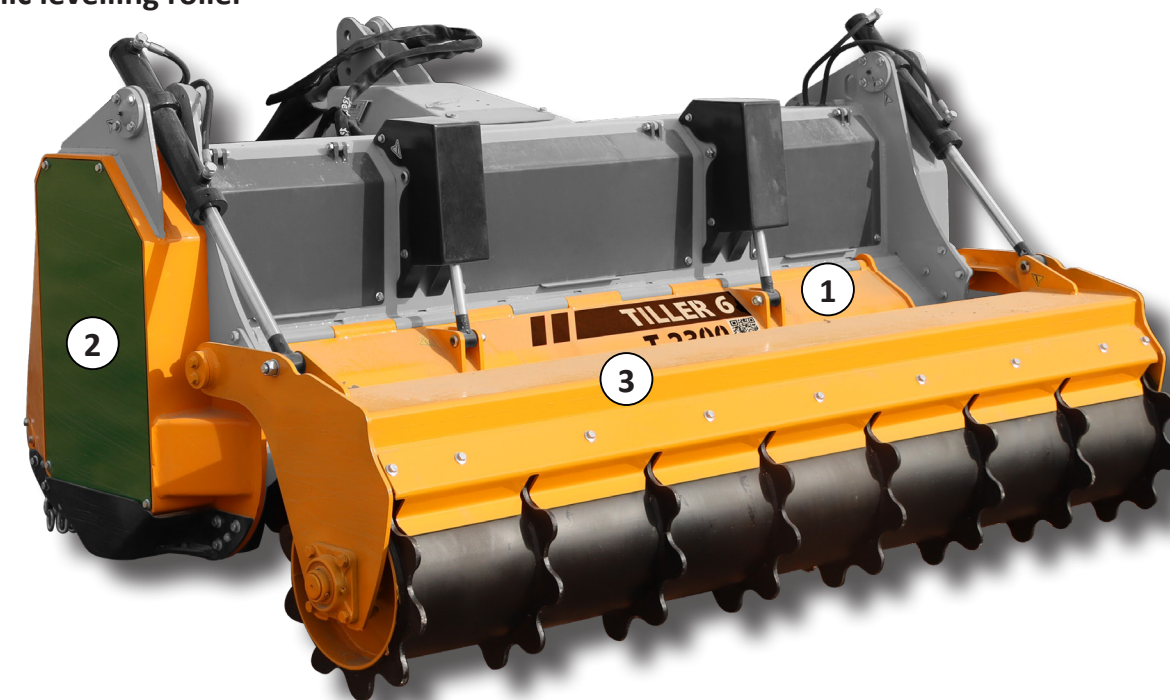

Centralized greasing

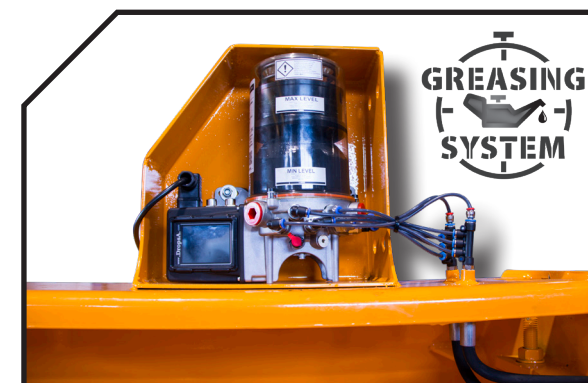

FIXE TOP System




*For working in depth it is recommended that the tractor has a Creeper or Vario.

MODEL				KG	N° BELTS TYPE				
						A	B	C	
	mm	KW-HP				mm-in	mm-in	mm-in	
T-2300	2300	134 - 180 224 - 300	50	4000	2 Synchronous	2685-106"	2295-90"	1700-67"	1000
T-2500	2500	134 - 180 224 - 300	56	4300	2 Synchronous	2885-114"	2295-90"	1700-67"	1000



Carretera nacional 240 km. 149,3
22310 Castejón del Puente (Huesca)-España
Tel. (+34) 974 417 830
www.serrat.com - comercial@serrat.com

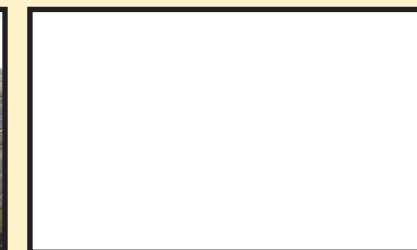

The data presented in this catalog are provided for information purposes only and are not binding.