



**TILLER 7**



Soil preparation machine up to a depth of 400 mm, for tractors between 300 - 500 HP. Transforms forest land, with stumps and rocks, in land for cultivation avoiding accidents in later processes.


CHARACTERISTICS

- ▶ Steel-plate chassis, thickness 12 mm.
  - ▶ Rotor FIXE TOP of Ø 700 mm.
  - ▶ Centralized greasing.
  - ▶ Gearbox SERRAT for 500 HP with Synkrodos-600.
  - ▶ Double synchronous belt transmission.
  - ▶ Supports of bearing rotor in steel.
  - ▶ Oscillating bearings of double row of rollers.
  - ▶ PTO 1,000 rpm.
  - ▶ Rear hydraulic hood.
  - ▶ Front hydraulic hood anti projections.
  - ▶ Chassis internal reinforcements, thickness 12 mm.
  - ▶ Anvil interchangeable.
  - ▶ System antiwire in rotor.
  - ▶ Compact drive cover.
- ▶ Hydraulic levelling roller.
  - ▶ Soil preparation machine up to a depth of 400 mm.
  - ▶ Model built under EC Normative.
  - ▶ Safety indicators visible to personnel.



- 1. Rear hydraulic hood
- 2. Compact drive cover
- 3. Hydraulic levelling roller

FIXE TOP System

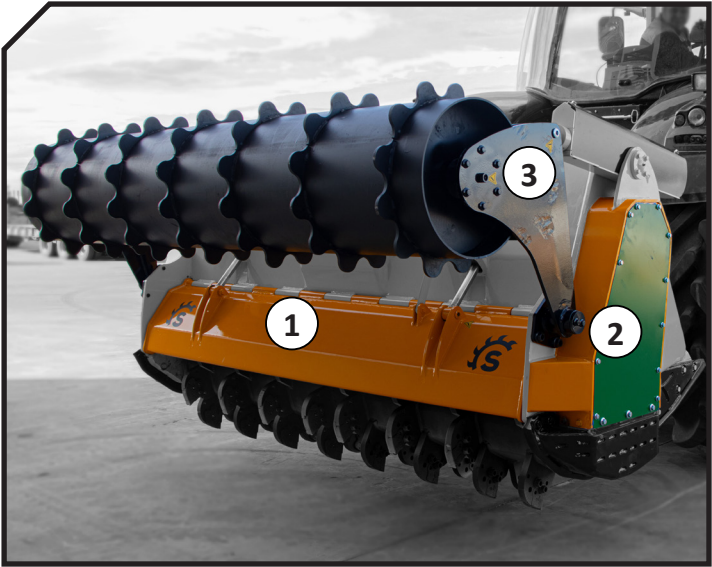

Centralized greasing



\*For working in depth it is recommended that the tractor has a Creeper or Vario.

MODEL					Nº BELTS TYPE				
	mm	KW-HP		KG		A mm-in	B mm-in	C mm-in	
T-2500	2500	224 - 300 373 - 500	56	5000	2 Synchronous	2890-114"	2400-94"	1955-77"	1000
T-3000	3000	224 - 300 373 - 500	68	6000	2 Synchronous	3390-134"	2400-94"	1955-77"	1000



Carretera nacional 240 km. 149,3  
22310 Castejón del Puente (Huesca)-España  
Tel. (+34) 974 417 830  
www.serrat.com - comercial@serrat.com



The data presented in this catalog are provided for information purposes only and are not binding.