



Soil preparation machine up to a depth of 500 mm, for tractors between 400 - 700 HP. Transforms forest land, with stumps and rocks, in land for cultivation avoiding accidents in later processes.


CHARACTERISTICS

- ▶ Steel-plate chassis, thickness 12 mm.
- ▶ Rotor **FIXE TOP** of Ø 900 mm.
- ▶ Gearbox **SERRAT** for 700 HP with gears.
- ▶ Speed change with gears (Optional).
- ▶ Supports of bearing rotor in steel.
- ▶ Oscillating bearings of double row of rollers.
- ▶ PTO 1,000 rpm.
- ▶ Rear hydraulic hood.
- ▶ Front hydraulic hood anti projections.
- ▶ Chassis internal reinforcements, thickness 12 mm.
- ▶ Interchangeable anvil.
- ▶ System antiwire in rotor.
- ▶ Hydraulic levelling roller.
- ▶ Soil preparation machine up to a depth of 500 mm.
- ▶ Model built under EC Normative.
- ▶ Safety indicators visible to personnel.





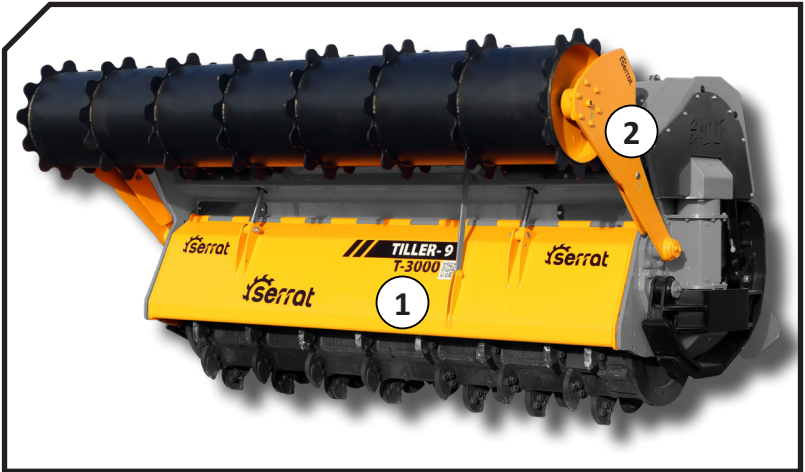



- 1. Rear hydraulic hood
- 2. Hydraulic levelling roller

FIXE TOP System



*For working in depth it is recommended that the tractor has a Creeper or Vario.

MODEL					GEARS				
						A	B	C	
	mm	KW-HP		KG		mm-in	mm-in	mm-in	
T-2500	2500	298 - 400 522 - 700	58	6450	2	3040-120"	2710-107"	1850-73"	1000
T-3000	3000	298 - 400 522 - 700	70	6670	2	3540-139"	2710-107"	1850-73"	1000

OPTIONS

- ▶ Speed change GRU 254 SCG



Carretera nacional 240 km. 149,3
22310 Castejón del Puente (Huesca)-España
Tel. (+34) 974 417 830
www.serrat.com - comercial@serrat.com



The data presented in this catalog are provided for information purposes only and are not binding.