





Soil preparation machine up to a depth of 400-500 mm, for tractors between 200 - 350 HP. It mulchs the stumps of old plantations, leaving a soft ground for the next plantation.






CHARACTERISTICS

- ▶ Steel-plate chassis, thickness 12 mm.
- ▶ Gearbox SERRAT 350 HP.
- ▶ Double synchronous belt transmission.
- ▶ Supports of bearing rotor in steel.
- ▶ Oscillating bearings of double row of rollers.
- ▶ Interchangeable rotor shaft.
- ▶ Solid steel rotor with teeth fitted inside the rotor.
- ▶ Double ploughshare for opening the land.
- ▶ PTO 1,000 rpm.
- ▶ Skid shoes.
- ▶ Rear hydraulic hood.
- ▶ Interchangeable 8 mm welded plates Hardox internal reinforcement.
- ▶ System antiwire in rotor.
- ▶ Compact drive cover.
- ▶ Model built under EC Normative.
- ▶ Safety indicators visible to personnel.

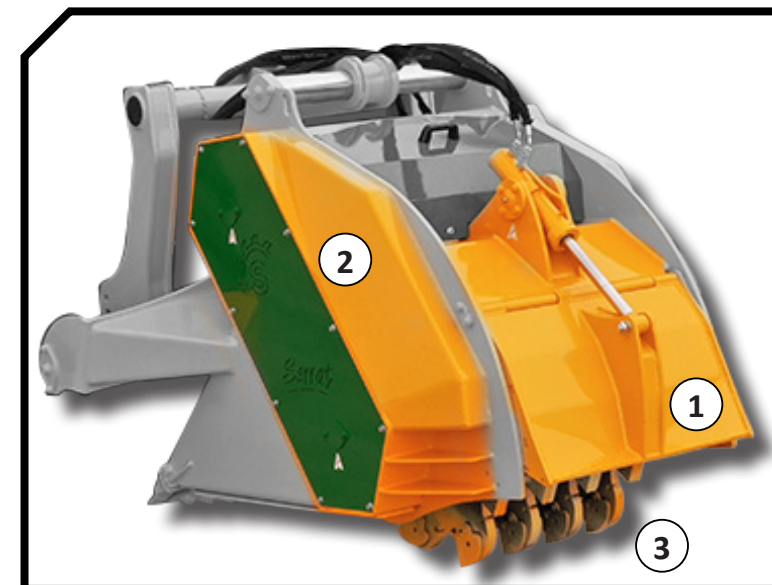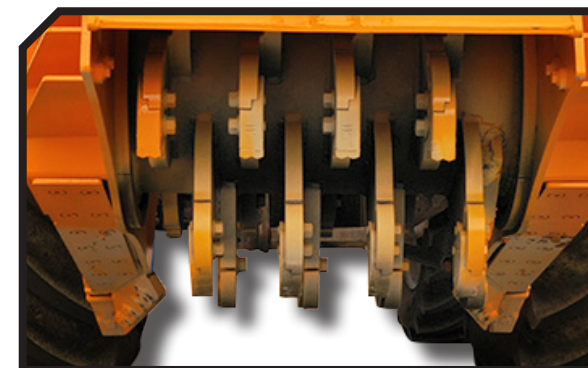

1. Rear hydraulic hood
2. Compact drive cover
3. Teeth fitted inside the rotor



MODEL									
					Nº BELTS TYPE				
	mm	KW-HP				A mm-in	B mm-in	C mm-in	
T-1100	1100	149 - 200 257 - 350	48	3600	2 Synchronous	1100-43"	1954-77"	1500-59"	1000

OPTIONS

- ▶ Centralized greasing

