



Head for mini excavators of weight until 3,5 t.

Steel-plate chassis of 4 mm with the hooking screwed on the top of the mulcher.

Hydraulic motor with Synchronous belt.


Suitable for the maintenance of greenspaces, riverbanks, bushes up to 20-30 mm.

### CHARACTERISTICS


- ▶ Non-wear steel-plate chassis, thickness 4 mm.
- ▶ Tubular rotor with forged agricultural hammers SERRAT.
- ▶ Head for mini excavators of weight until 3,5 T.
- ▶ Synchronous belts transmission.
- ▶ Double safety chains.
- ▶ High speed and high strength bearings.
- ▶ Hydraulic gear motor.
- ▶ Valve of recirculation incorporated into the motor.
- ▶ Skid shoes.
- ▶ Model built under EC Normative.
- ▶ Safety indicators visible to personnel.





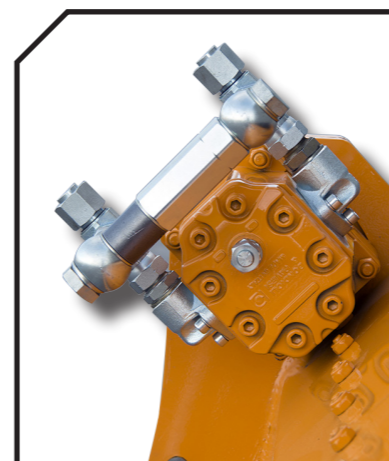

Hydraulic gear motor

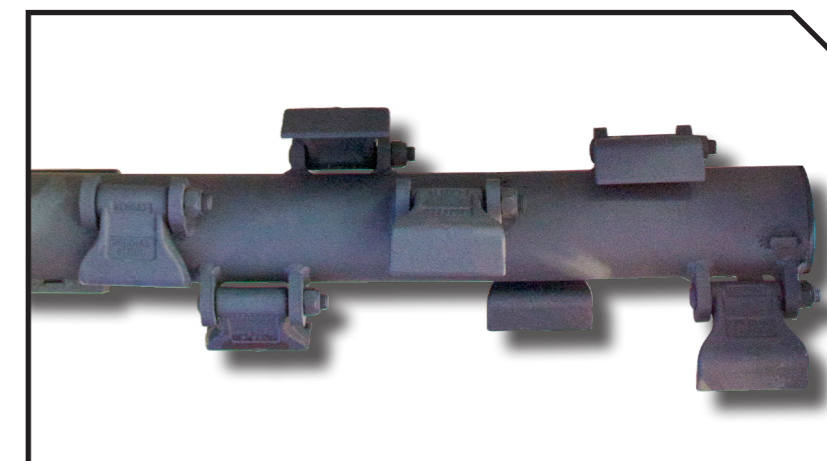


Rotor with forged hammers



MODEL	 mm	HORSE POWER		 KG	Nº BELTS TYPE				 RPM Rotor max.	
		min. req.	max. aut.			A mm-in	B mm-in	C mm-in		
T-800	800	35-45 l/min	200 bar	9	140	Synchronous	910-36"	640-25"	487-19"	3000

### OPTIONS

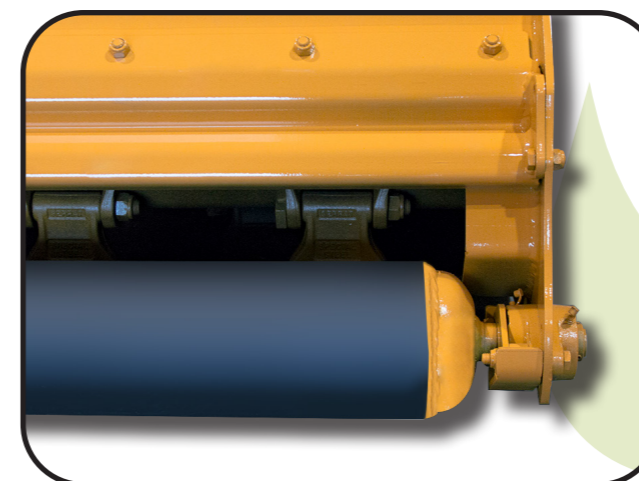

▶ Rear height-adjustable roller



▶ Hooking

