



Adaptable for excavators and special carriers having a weight between 6 and 15 t.

Steel-plate chassis of 8 mm with the hooking screwed on the top of the mulcher, which reinforce the chassis, giving the possibility of several positions of use.


Suitable for the maintenance of forest, riverbanks, bushes up to 80 mm of diameter

CHARACTERISTICS


- ▶ Non-wear steel-plate chassis, thickness 8 mm.
- ▶ Rotor POLSER + of Ø 470 mm.
- ▶ Mulcher for excavators having a weight between 6 and 15 T.
- ▶ 3 XPC side belt transmission.
- ▶ Double safety chains.
- ▶ High speed and high strength bearings.
- ▶ Hydraulic engine with pistons.
- ▶ Valve of recirculation incorporated into the motor.
- ▶ Skid shoes.
- ▶ Compact drive cover.
- ▶ Swinging forged forestry hammers 360° or fixed tooth with tip in tungsten or blades DRR.
- ▶ Model built under EC Normative.
- ▶ Safety indicators visible to personnel.



Hydraulic engine with pistons

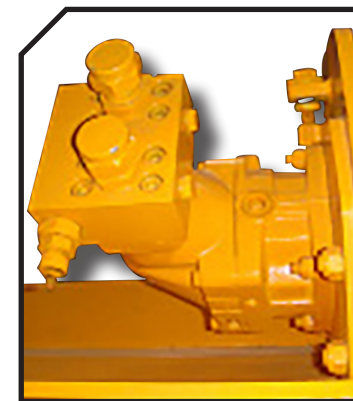


Blades DRR




Swinging forged forestry hammers 360°




Fixed tooth with tip in tungsten

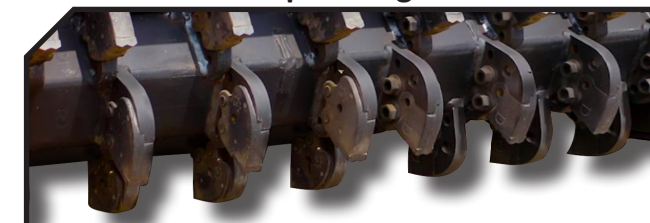


FIXE TOP System



MODEL								N° BELTS TYPE				
	mm	min. req.	max. aut.						A mm-in	B mm-in	C mm-in	RPM Rotor max.
T-800	800	70-90 l/min	350 bar	8	20	10	618	3 XPC	1075-42"	1145-45"	720-28"	2200
T-1000	1000	70-90 l/min	350 bar	8	26	13	695	3 XPC	1275-50"	1145-45"	720-28"	2200
T-1200	1200	70-90 l/min	350 bar	12	32	16	771	3 XPC	1475-58"	1145-45"	720-28"	2200
T-1400	1400	70-90 l/min	350 bar	12	36	19	839	3 XPC	1675-66"	1145-45"	720-28"	2200

OPTIONS

- ▶ Variable displacement motor

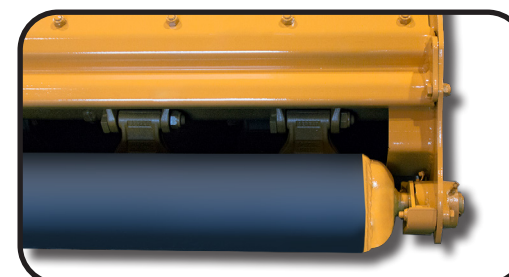

- ▶ Rear height-adjustable roller

- ▶ Mechanical hood
- ▶ Hydraulic hood



- ▶ Hooking
- ▶ Ripper

