

Adaptable for excavators and special carriers having a weight between 25 and 50 t.

Steel-plate chassis of 10 mm with the hooking screwed on the top of the mulcher which reinforce the chassis, giving the possibility of several positions of use.


Suitable for the maintenance of forest, riverbanks, bushes up to 250 mm of diameter.

### CHARACTERISTICS


- ▶ Non-wear steel-plate chassis, thickness 10 mm.
- ▶ Rotor POLSER + of Ø 625 mm.
- ▶ Mulcher for excavators having a weight between 25 and 50 T.
- ▶ 5 XPC side belt transmission.
- ▶ Double safety chains.
- ▶ Swinging forged forestry hammers 360° or fixed tooth with tip in tungsten or blades DRR.
- ▶ High speed and high strength bearings.
- ▶ Hydraulic engine with pistons.
- ▶ Valve of recirculation incorporated into the motor.
- ▶ Skid shoes.
- ▶ Model built under EC Normative.
- ▶ Safety indicators visible to personnel.




Compact drive cover

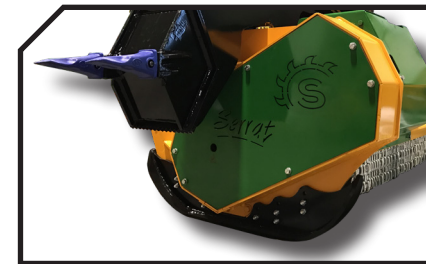

Hydraulic engine with pistons




Blades DRR




Swinging forged forestry hammers 360°





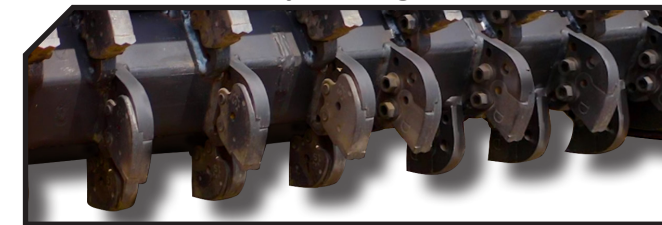





Fixed tooth with tip in tungsten



FIXE TOP System




MODEL

MODEL												
	mm	HORSE POWER				KG	N° BELTS TYPE				RPM Rotor max.	
		min. req.	max. aut.						A mm-in	B mm-in	C mm-in	
T-2000	2000	200-220 l/min	350 bar	20	50	26	1820	5 XPC	2278-90"	1316-52"	912-36"	1800
T-2300	2300	200-220 l/min	350 bar	20	56	29	2250	5 XPC	2580-102"	1316-52"	912-36"	1800

### OPTIONS

▶ Hydraulic hood

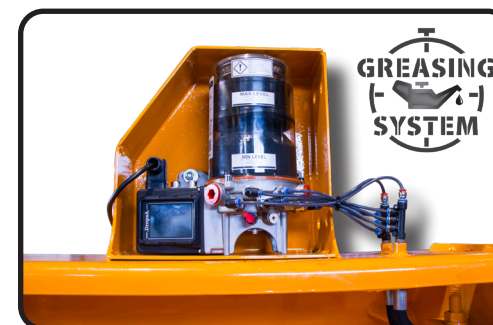

▶ Centralized greasing

▶ Mechanical hood



▶ Hooking

▶ Ripper

