




The mulcher Cabezal MF-3 is a standard flow mulching attachment suitable to compact track loader having a weight between 3 and 9 t.

Suitable for wood up to 80 - 100 mm with hammers and 200 - 250 mm with fixed tooth. It is equipped with a 470 mm diameter POLSER + rotor with retractable hammers, and can be coupled with a tungsten pick rotor, which allows working with stumps, roots and large branches.

CHARACTERISTICS

- ▶ Non-wear steel-plate chassis, thickness 8 mm.
- ▶ Rotor POLSER + of Ø 470 mm.
- ▶ Mulcher for head compact track loader having a weight between 3 and 9 T.
- ▶ 3 XPC side belt transmission.
- ▶ Safety chains.
- ▶ High speed and high strength bearings.
- ▶ Hydraulic engine with pistons.
- ▶ Skid shoes.
- ▶ Swinging forged forestry hammers 360° or fixed tooth with tip in tungsten or blades DRR.
- ▶ Compact drive cover.
- ▶ Valve of recirculation incorporated into the motor.
- ▶ Rear hydraulic hood.
- ▶ Model built under EC Normative.
- ▶ Safety indicators visible to personnel.

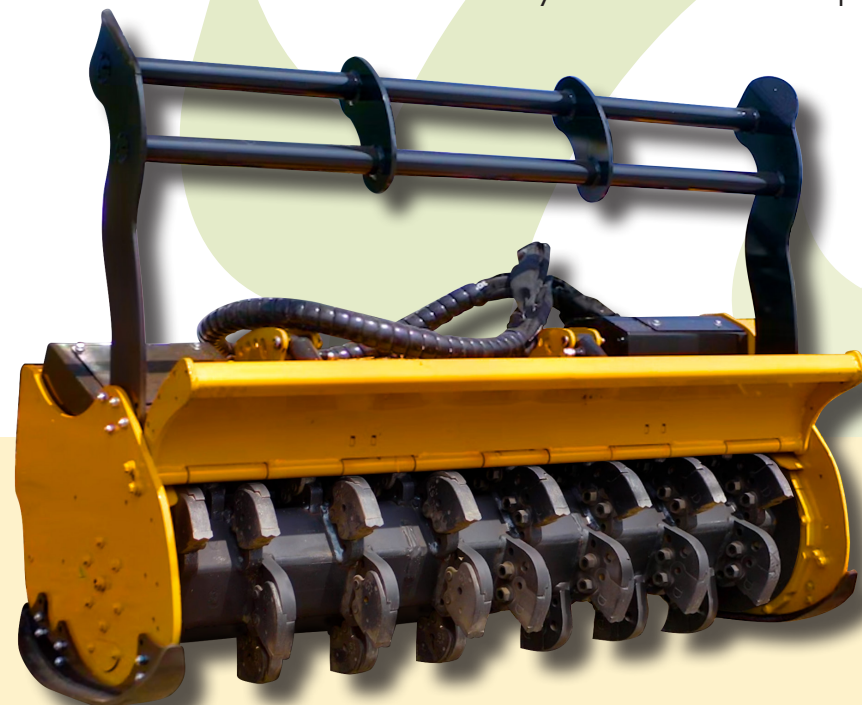

Hydraulic hood




Swinging forged forestry hammers 360°




Blades DRR




Valve of recirculation incorporated into the motor

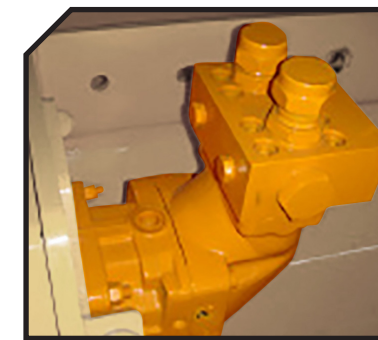

Fixed tooth with tip in tungsten

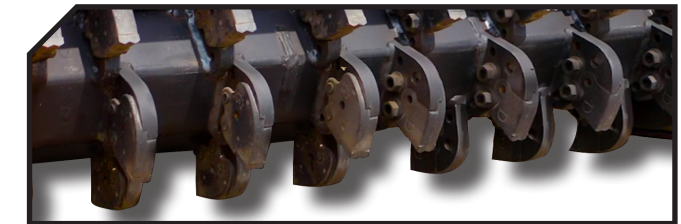

FIXE TOP System




MODEL

MODEL		 HORSE POWER						N° BELTS TYPE				 RPM Rotor max.
	mm	min. req.	max. aut.				A mm-in		B mm-in	C mm-in		
T-1400	1400	90-100 l/min	350 bar	12	36	19	793	3 XPC	1635-64"	995-39"	812-32"	2200
T-1600	1600	90-100 l/min	350 bar	16	44	22	897	3 XPC	1835-72"	995-39"	812-32"	2200
T-1800	1800	90-100 l/min	350 bar	16	50	24	957	3 XPC	2035-80"	995-39"	812-32"	2200
T-2000	2000	90-100 l/min	350 bar	20	50	26	1015	3 XPC	2235-88"	995-39"	812-32"	2200


OPTIONS

▶ Hooking

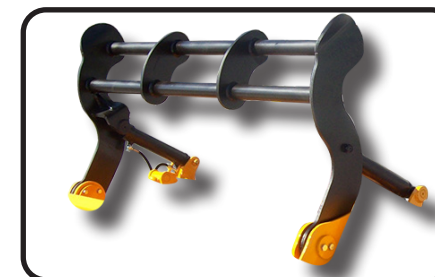

▶ Pushing frame

▶ Electro-valve

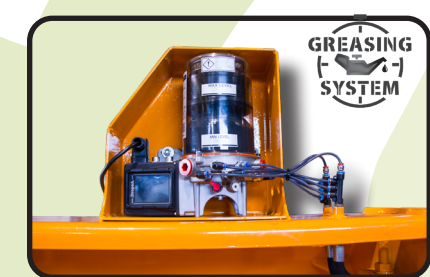

▶ Centralized greasing

