

Offset mulcher of high range with forestry rotor, for works in agricultural margins, banks, highways, channels, roads and others clears of public works for tractors between 140-200 HP. It incorporates safety system thanks to a valve positionned in the cylinder of elevation of the arm. Angulation +90° / -50°. Rotor POLSER + of 550 mm Ø with forestry SERRAT hammer swinging 360°.

## CHARACTERISTICS

- ▶ Non-wear steel-plate chassis, thickness 10 mm.
- ▶ Rotor POLSER + of Ø 550 mm.
- ▶ External gearbox SERRAT.
- ▶ 4 XPC side belt transmission.
- ▶ Double transmission with a centre shaft and Homokinetic knot on the second transmission.
- ▶ Supports of bearing rotor in steel.
- ▶ Height-adjustable rear roller Ø 210 mm.
- ▶ PTO 750 rpm.
- ▶ High speed and high strength bearings.
- ▶ Front protection curtain.
- ▶ Skid shoes.
- ▶ Double bearing on rear roller.
- ▶ Angulation +90°/-50°.
- ▶ Hydraulic lateral offset mulcher.
- ▶ Safety valve.
- ▶ Model built under EC Normative.
- ▶ Safety indicators visible to personnel.



Centre shaft with homocinetic knot



Forestry SERRAT Hammer



Angulation +90°



-50°



Homokinetic join on the second drive shafts




## OPTIONS

### ▶ Internal gearbox

| MODEL  |  |  |  |  |  |  |  |  |  |  |  |  |
|--------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|        | mm                                                                                    | KW-HP                                                                                 | KG                                                                                    | Nº BELTS TYPE                                                                         |                                                                                       | A mm-in                                                                               | B1 mm-in                                                                              | B2 mm-in                                                                              | C mm-in                                                                               | D mm-in                                                                               | E mm-in                                                                               |                                                                                       |
| T-1600 | 1600                                                                                  | 104 - 140<br>149 - 200                                                                | 12                                                                                    | 1600                                                                                  | 4 XPC                                                                                 | 1600-63"                                                                              | 2981-117"                                                                             | 3004-118"                                                                             | 608-24"                                                                               | 2335-92"                                                                              | 439-17"                                                                               | 750                                                                                   |
| T-1800 | 1800                                                                                  | 104 - 140<br>149 - 200                                                                | 16                                                                                    | 1800                                                                                  | 4 XPC                                                                                 | 1800-71"                                                                              | 2981-117"                                                                             | 3004-118"                                                                             | 608-24"                                                                               | 2535-100"                                                                             | 639-25"                                                                               | 750                                                                                   |
| T-2000 | 2000                                                                                  | 104 - 140<br>149 - 200                                                                | 16                                                                                    | 2050                                                                                  | 4 XPC                                                                                 | 2000-79"                                                                              | 2981-117"                                                                             | 3004-118"                                                                             | 608-24"                                                                               | 2735-108"                                                                             | 839-33"                                                                               | 750                                                                                   |
| T-2300 | 2300                                                                                  | 104 - 140<br>149 - 200                                                                | 20                                                                                    | 2300                                                                                  | 4 XPC                                                                                 | 2300-91"                                                                              | 2981 -117"                                                                            | 3004-118"                                                                             | 608-24"                                                                               | 3035-119"                                                                             | 1139-45"                                                                              | 750                                                                                   |
| T-2500 | 2500                                                                                  | 104 - 140<br>149 - 200                                                                | 24                                                                                    | 2400                                                                                  | 4 XPC                                                                                 | 2500-98"                                                                              | 2981-117"                                                                             | 3004-118"                                                                             | 608-24"                                                                               | 3235-128"                                                                             | 1339-53"                                                                              | 750                                                                                   |



Carretera nacional 240 km. 149,3  
22310 Castejón del Puente (Huesca)-España  
Tel. (+34) 974 417 830  
www.serrat.com - comercial@serrat.com

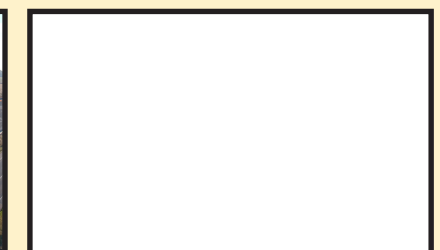

The data presented in this catalog are provided for information purposes only and are not binding.