



Mulcher for the cut and withdrawal of grass and branches up to 80 mm of diameter. Cleanliness of gardens, facilities sports and withdrawal of pruning in vineyard and fruit-bearing trees.

Great capacity of absorption for the withdrawal of leaves and all kinds of garbages (tins, papers, bottles of plastic, bags, etc.).

Collection of aromatic plants.

CHARACTERISTICS


- ▶ Non-wear steel-plate chassis, thickness 8 mm.
- ▶ Rotor POLSER of Ø 550 mm.
- ▶ Hammers guaranteed against breakage.
- ▶ Side belt transmission.
- ▶ GIROSTOP system into the bolt of the hammer.
- ▶ Basket of storage.
- ▶ Hydraulic unload.
- ▶ PTO 540 rpm.
- ▶ Skid shoes.
- ▶ Height-adjustable rear roller.
- ▶ Model built under EC Normative.
- ▶ Safety indicators visible to personnel.



Storage




Rear height-adjustable roller

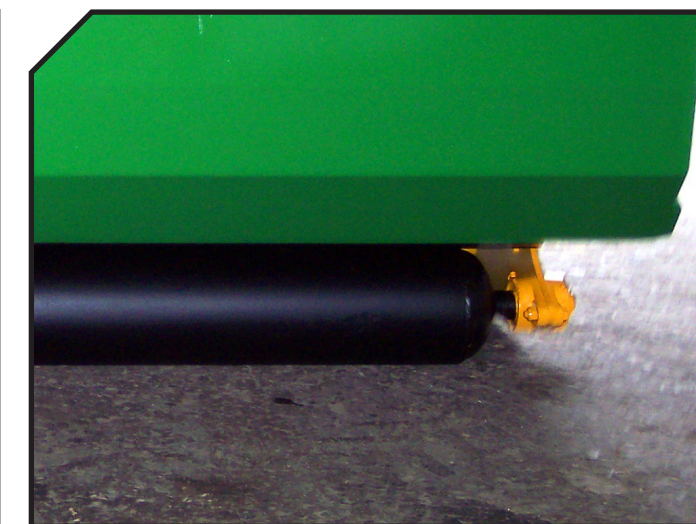

MODEL	mm	KW-HP	CAPACITY HOPPER	KG	N° BELTS TYPE	mm-in			540
						A	B	C	
T-1800	1800	63 - 85 96 - 130	16	2,3 m³	1170	3 XPC	2060-81"	2179-86"	1558-61"
T-2000	2000	63 - 85 96 - 130	16	2,5 m³	1255	3 XPC	2260-89"	2179-86"	1558-61"

OPTIONS

▶ Freewheel

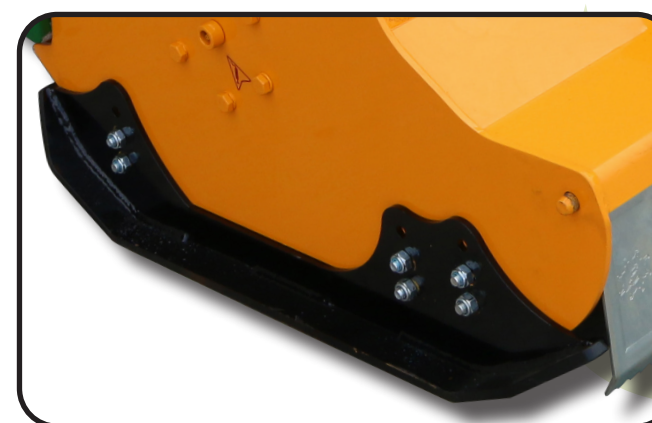

▶ Long skid shoes



▶ Front chains

